




Product Catalogue

STRUCTURE

Light Weight Truss System
C & Z Purlin
Floor Decking

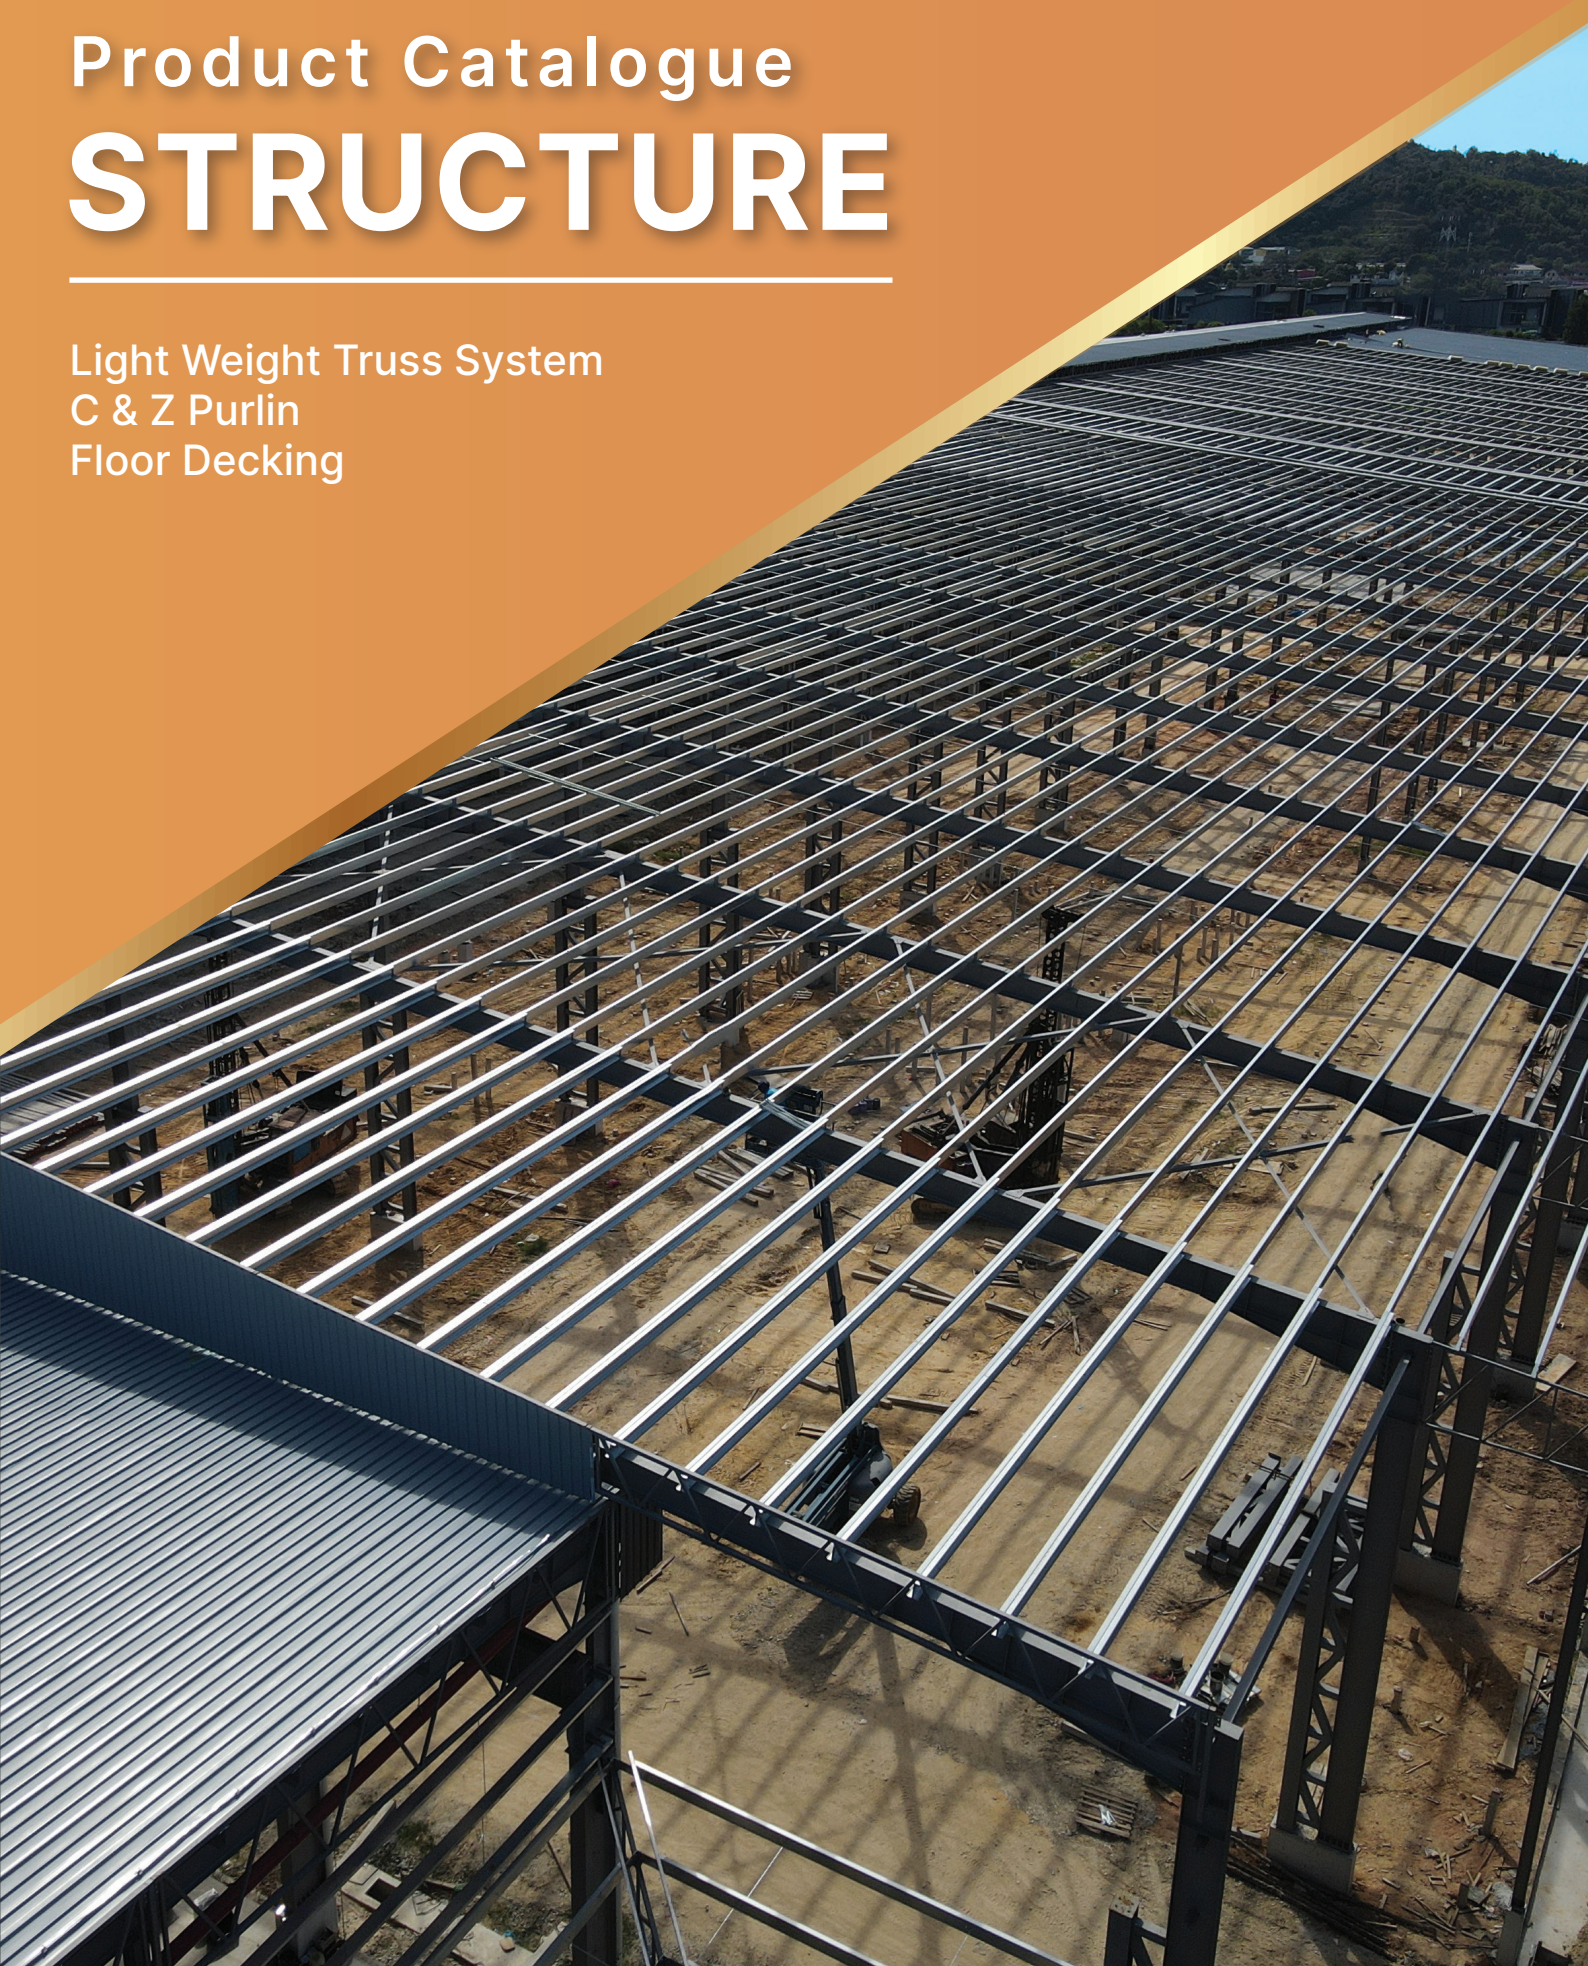

Ledex® Light Weight Truss System also known as Light Channel or C Section, is used in building construction and civil engineering. It uses high tensile steel trusses in the roofing system to enhance the strength and durability of the overall roofing system, compared to the conventional timber trusses. Our products have been tested and verified by the SIRIM QAS International.


Ledex® Light Weight Truss System is specially designed from a variety of quality finishes such as zinc/aluminium to maximize the safety and durability of the roofing system. In fact, our product is customized for fast installation and cost effectiveness.

Supplied by Bluescope Steel, our materials are guaranteed to be superior in quality. There are two types of materials to be chosen from Zacs and Tinted Blue, which is suitable for hardware and economic purposes, and TrueCore®, which is mainly for projects.




Ledex[®]


Light Weight Truss System[®]

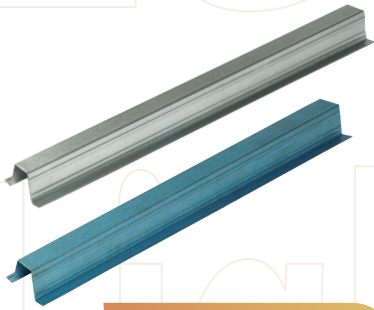


Ledex[®] Batten 121

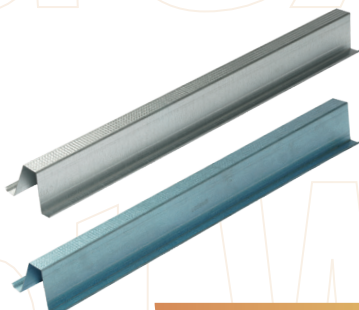


Ledex[®] Batten 172

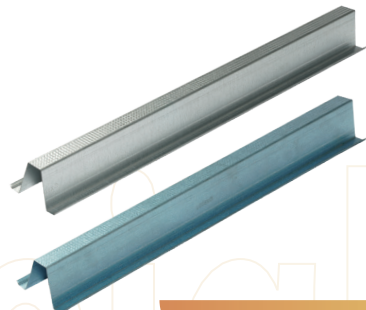


Ledex[®] Batten 110



Ledex[®] Light Channel 135



Ledex[®] Light Channel 151

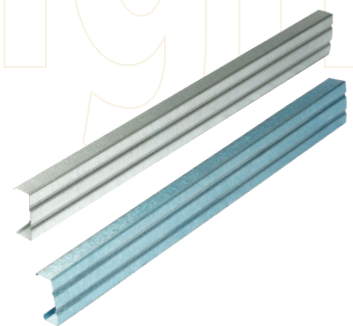


Ledex[®] Light Channel 110

WHERE CAN IT APPLY

Support for Roof Load

Horizontal Stability Enhancement

Ledex® Light Weight Truss System

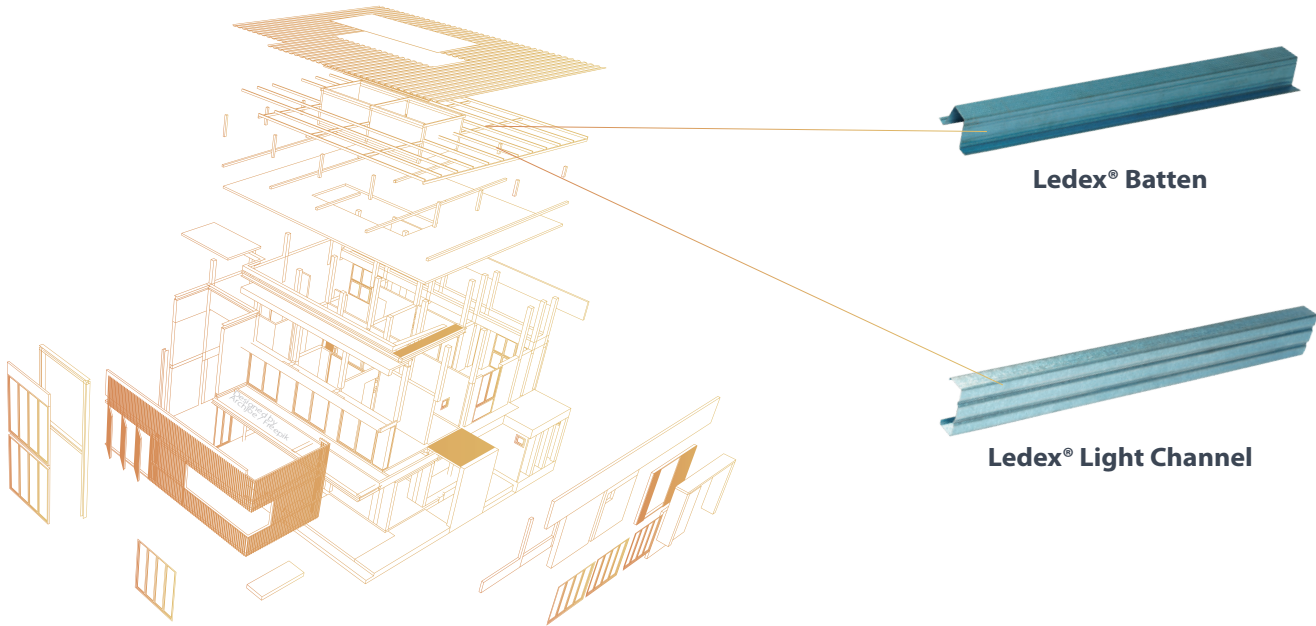

It's Advantages

- | | | |
|--------------------------|---|------------------------|
| Strong | Design Flexibility | Termite Free |
| High Tensile | Time Saving Installation | Earth-Friendly |
| Fire Resistant | High Buildability Score | Cost Effective |
| Against Corrosion | Dimensionally Stable | Quality Control |
| Pest Resistant | Increase in Efficiency of Construction | Light Weight |

Our products have been tested and verified by the SIRIM QAS International for its strength.

BQ Specification

Ledex® Light Weight Truss System



Example


Design, fabricate & install Ledex® Light Weight Truss System, Ledex® Light Channel 135 0.8 mm TCT, Ledex® Batten 121 0.47 mm TCT, Ledex® Batten 172 0.5 mm TCT, with material AZ150 Truecore®, reinforced with Ledex® Truss Bracket 50 x 100 with associated fitting, bolts & nuts, with engineer's approval in accordance to manufacturer specifications.

Material Specifications

- Ledex® Purlin thickness comes in 4 types which are **1.6mm, 2.0mm, 2.5mm and 3.0mm.**
- Hot dip galvanized steel to JIS G 3302 or AS1397
- Zinc coating mass from min 180g/m² up to 275g/m²
- Hi-Tensile Grade G450 Minimum Yield Strength


We can custom according to customers' requirements.

Ledex® Batten 110

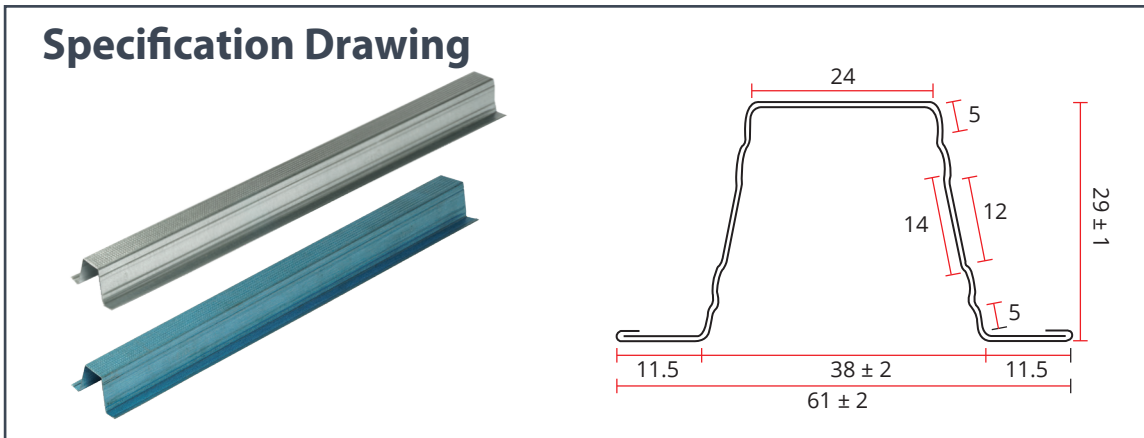

Profile	Ledex® Batten 110	
Dimension	24 mm (Width) x 29 mm (Height) x 6000 mm (Length)	
Steel Grade	Zincalume G550 Steel	
Finishing	Zacs Bare, Tinted Blue	
Thickness TCT (mm)	0.45	0.47
Weight (kg/m)	0.37	0.39
Tolerance	Length +1, -3 mm, Thickness ± 0.03 mm	


Ledex® Batten 121

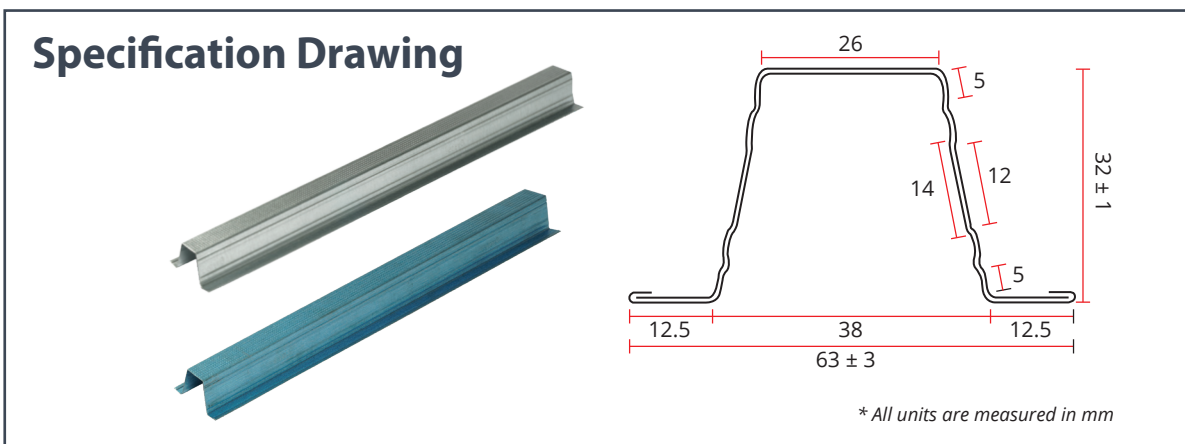

Profile	Ledex® Batten 121				
Dimension	26 mm (Width) x 32 mm (Height) x 6000 mm (Length)				
Steel Grade	Zincalume G550 Steel				
Finishing	Zacs Bare, Tinted Blue			TrueCore	
Thickness TCT (mm)	0.45	0.47	0.50	0.47	0.50
Weight (kg/m)	0.40	0.42	0.45	0.42	0.48
Tolerance	Length +1, -3 mm, Thickness ± 0.03 mm				

Ledex® Light Channel 151 (LC 75)


Specification Drawing

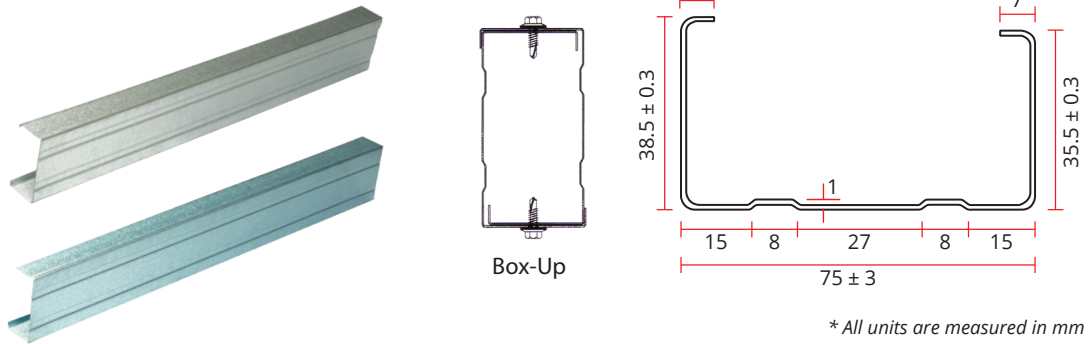

Profile	Ledex® Light Channel 151 (LC 75)				
Dimension	75 mm (Width) x 38 mm (Height) x 6000 mm (Length)				
Steel Grade	Zincalume G550 Steel				
Finishing	Zacs Bare, Tinted Blue		TrueCore		
Thickness TCT (mm)	0.75	1.00	0.75	0.80	1.00
Weight (kg/m)	0.85	1.20	0.86	0.91	1.22
Tolerance	Length +1, -3 mm, Thickness ± 0.03 mm				

Ledex® Batten 172


Specification Drawing

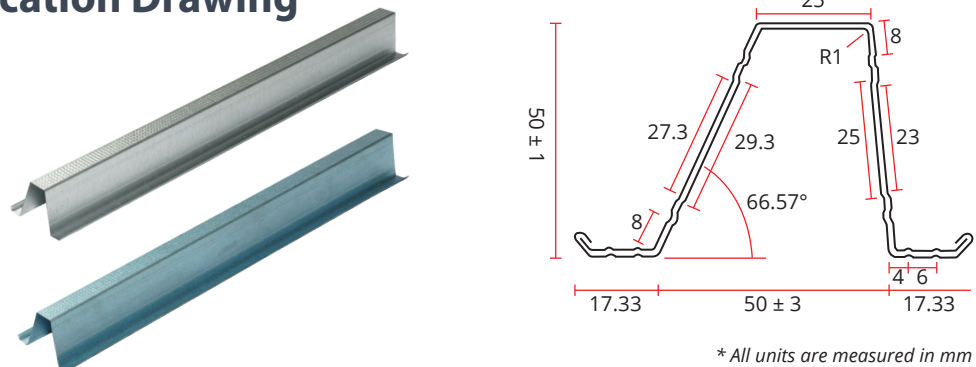

Profile	Ledex® Batten 172	
Dimension	25 mm (Width) x 50 mm (Height) x 6000 mm (Length)	
Steel Grade	Zincalume G550 Steel	
Finishing	Zacs Bare, Tinted Blue	TrueCore
Thickness TCT (mm)	0.47	0.50
Weight (kg/m)	0.58	0.69
Tolerance	Length +1, -3 mm, Thickness ± 0.03 mm	

Ledex® Light Channel 110 (LC 55)

Specification Drawing

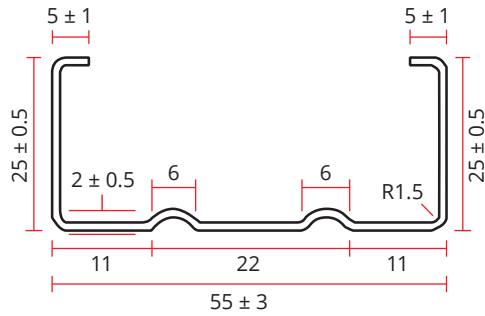


* All units are measured in mm

Profile	Ledex® Light Channel 110 (LC 55)		
Dimension	55 mm (Width) x 25 mm (Height) x 6000 mm (Length)		
Steel Grade	Zincalume G550 Steel		
Finishing	Zacs Bare, Tinted Blue		TrueCore
Thickness TCT (mm)	0.75	1.00	0.80
Weight (kg/m)	0.62	0.88	0.67
Tolerance	Length +1, -3 mm, Thickness ± 0.03 mm		

Ledex® Light Channel 135 (LC 75)



Specification Drawing

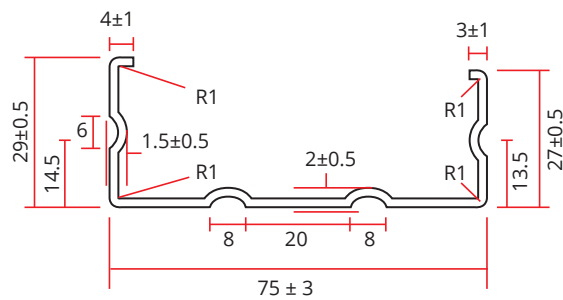

* All units are measured in mm


Profile	Ledex® Light Channel 135 (LC 75)				
Dimension	75 mm (Width) x 29 mm (Height) x 6000 mm (Length)				
Steel Grade	Zincalume G550 Steel				
Finishing	Zacs Bare, Tinted Blue		TrueCore		
Thickness TCT (mm)	0.75	1.00	0.75	0.80	1.00
Weight (kg/m)	0.75	1.07	0.76	0.82	1.08
Tolerance	Length +1, -3 mm, Thickness ± 0.03 mm				

SECTION PROPERTIES

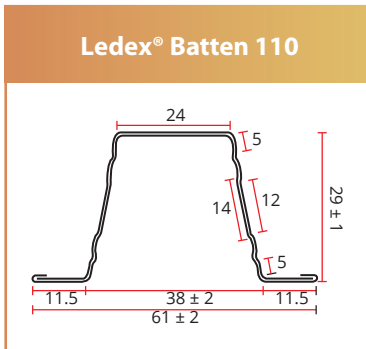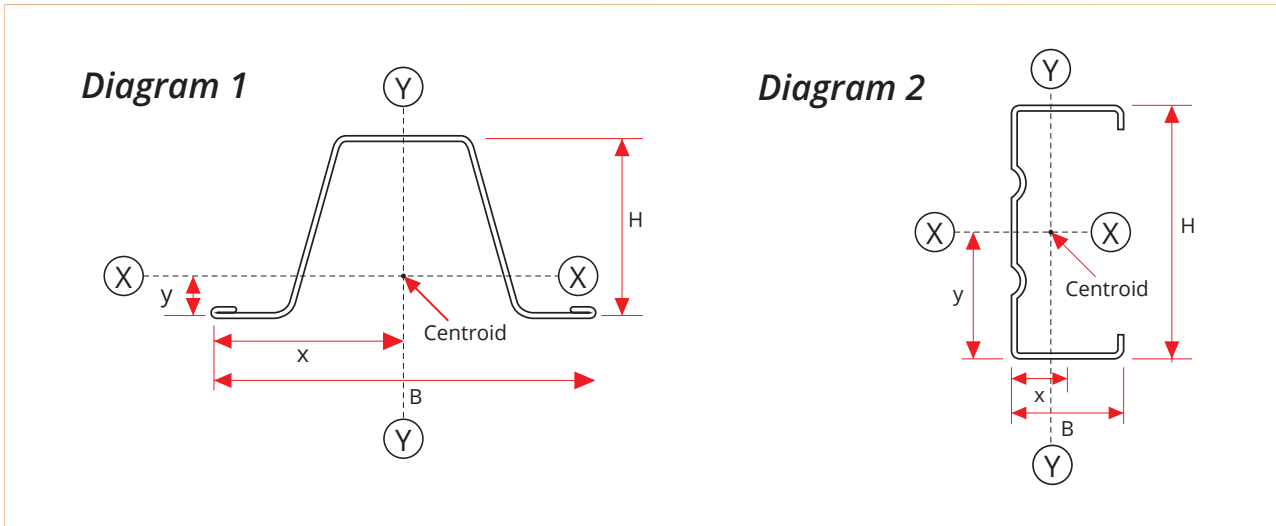


Thickness t (mm)	Area mm^2	Weight kg/m	I_{xx} 10^4 mm^4	I_{yy} 10^4 mm^4	Z_{xx} 10^3 mm^3	Z_{yy} 10^3 mm^3	R_{xx} mm	R_{yy} mm	x mm	y mm
0.45	48.47	0.44	0.769	1.080	0.48	0.40	12.60	14.93	26	15.11
0.47	51.70	0.47	0.827	1.159	0.52	0.43	12.64	14.97	26	15.11

Refer to Diagram 1

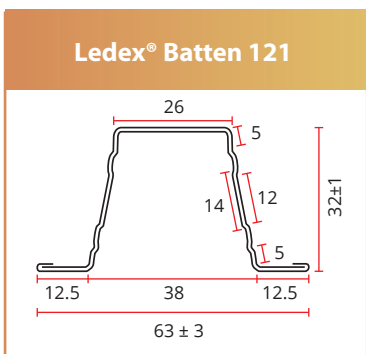

Thickness t (mm)	Area mm^2	Weight kg/m	I_{xx} 10^4 mm^4	I_{yy} 10^4 mm^4	Z_{xx} 10^3 mm^3	Z_{yy} 10^3 mm^3	R_{xx} mm	R_{yy} mm	x mm	y mm
0.45	57.78	0.40	1.002	2.015	0.651	0.636	13.2	18.7	31.7	15.4
0.47	61.6	0.42	1.068	2.146	0.693	0.678	13.2	18.7	31.7	15.4
0.50	64.14	0.45	1.111	2.233	0.722	0.705	13.2	18.7	31.7	15.4


Refer to Diagram 1

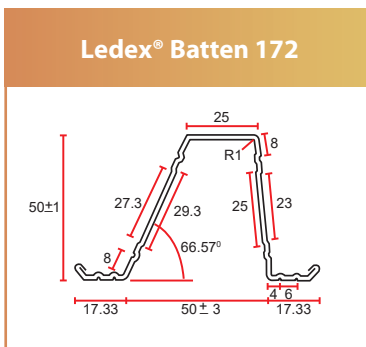

Thickness t (mm)	Area mm^2	Weight kg/m	I_{xx} 10^4 mm^4	I_{yy} 10^4 mm^4	Z_{xx} 10^3 mm^3	Z_{yy} 10^3 mm^3	R_{xx} mm	R_{yy} mm	x mm	y mm
0.47	88.77	0.58	3.116	5.098	1.397	1.123	18.7	24.0	45.4	22.3
0.50	92.45	0.69	3.244	5.308	1.455	1.169	18.7	24.0	45.4	22.3

Refer to Diagram 1


Ledex® Light Channel 110 (LC55)



Thickness t (mm)	Area mm ²	Weight kg/m	I _{xx} 10 ⁴ mm ⁴	I _{yy} 10 ⁴ mm ⁴	Z _{xx} 10 ³ mm ³	Z _{yy} 10 ³ mm ³	R _{xx} mm	R _{yy} mm	x mm	y mm
0.75	84.16	0.62	4.182	0.651	1.494	0.869	22.3	8.8	7.5	28.0
0.80	89.57	0.67	4.441	0.689	1.586	0.918	22.3	8.8	7.5	28.0
1.00	110.97	0.88	5.452	0.834	1.947	1.112	22.2	8.7	7.5	28.0

Refer to Diagram 2


Ledex® Light Channel 135 (LC75)



Thickness t (mm)	Area mm ²	Weight kg/m	I _{xx} 10 ⁴ mm ⁴	I _{yy} 10 ⁴ mm ⁴	Z _{xx} 10 ³ mm ³	Z _{yy} 10 ³ mm ³	R _{xx} mm	R _{yy} mm	x mm	y mm
0.75	104.75	0.76	8.824	1.055	2.351	1.290	29.0	10.0	8.2	37.5
0.80	111.54	0.82	9.379	1.118	2.501	1.364	29.0	10.0	8.2	37.5
1.00	138.44	1.08	11.555	1.361	3.081	1.660	28.9	9.9	8.2	37.5

Refer to Diagram 2

Ledex® Light Channel 151 (LC75)



Thickness t (mm)	Area mm ²	Weight kg/m	I _{xx} 10 ⁴ mm ⁴	I _{yy} 10 ⁴ mm ⁴	Z _{xx} 10 ³ mm ³	Z _{yy} 10 ³ mm ³	R _{xx} mm	R _{yy} mm	x mm	y mm
0.75	118	0.86	10.369	2.095	2.896	1.798	29.6	13.3	11.7	35.8
0.80	125.6	0.91	11.015	2.220	3.076	1.908	29.6	13.3	11.7	35.8
1.00	155.57	1.22	13.544	2.703	3.782	2.320	29.5	13.2	11.7	35.8

Refer to Diagram 2

Accessories





Anchor Bolt

Size : 5/16 x 2^{5/8} (18P) x 11mm



Self-Drilling Hex Head Screw

Size : DSM HO 516

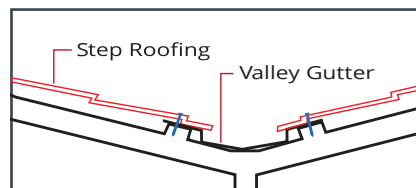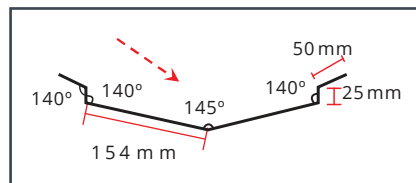

Valley Gutter (LN18)

Size : 457mm x 2440mm



Ledex® Truss Bracket

Dimension : 50 mm (Width) x 75 mm (Height)
50 mm (Width) x 100 mm (Height)

Steel Grade : Galvanised Iron G450

Thickness (TCT) : 1.60 mm

Ledex® Fascia Board

Fascia Board is the long, straight metal board that fixes along the lower edge of the roof. It is fixed directly to the roof trusses.


What is the function of Ledex® Fascia Board ?

Ledex® Fascia Board is essential foundation for gutters, providing support to the bottom row of tiles, joining for conjunction with soffits, providing essential ventilation for attic and keep pests out.




Ledex® Fascia Board

Specification Drawing

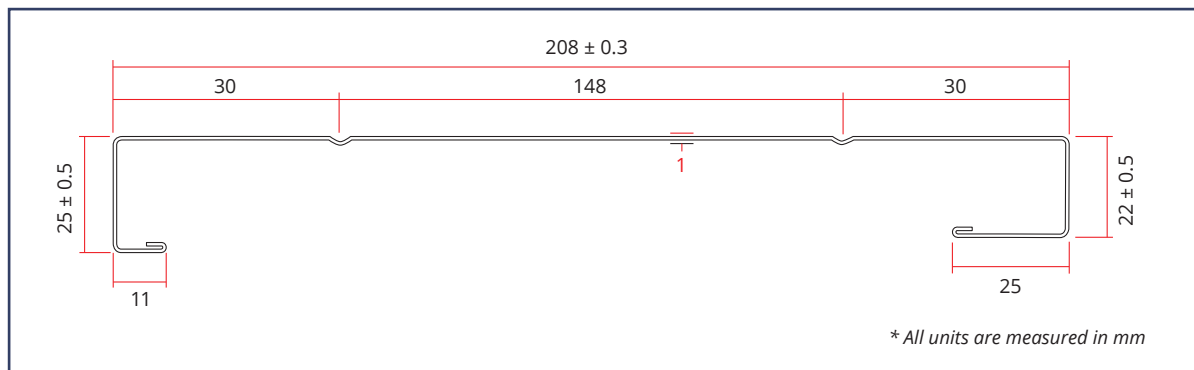

Profile	Ledex® Fascia Board	
Dimension	25 mm (Width) x 208 mm (Height)	
Steel Grade	Zincalume G300 Steel	
Finishes	Zincalume, Element, Colorbond	
Thickness (TCT)	0.40 mm	0.60 mm
Weight (kg/m)	0.85	1.35
Tolerance	Length ± 3 mm, Thickness ± 0.03 mm	

Installation of Ledex® Fascia Board

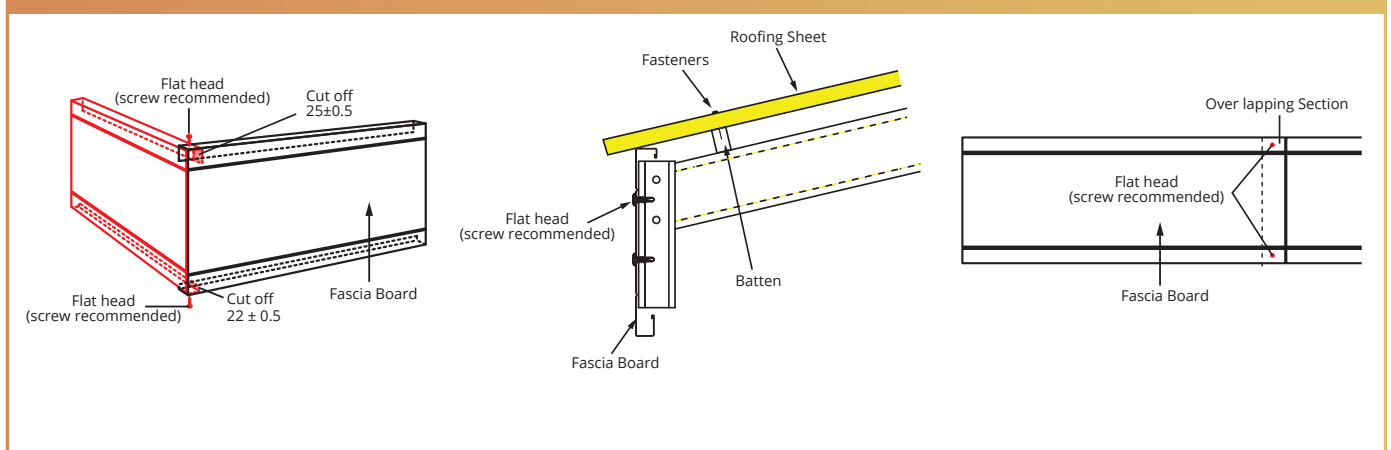

The fascia on a home is the board that is nailed across the edge of the roof behind the gutters. If you notice that your fascia has sustained damage then you will need to replace the fascia.


Fascia installation can be challenging to the beginner as they are unsure of how to place the fascia correctly. Follow the preparation and installation instructions below and you will surely have it done within a reasonable amount of time. Get your family members involved in order to speed up the process.

Ledex® Steel Gutter

Ledex® Steel Gutter, also known as “rain catcher”, consists of a narrow channel that acts as collector and diverts rainwater away from the roof edge.


What is the function of Ledex® Steel Gutter ?

- Keeps entrance surface dry
- Protects painted surface by reducing the exposure to water
- Reduces erosion

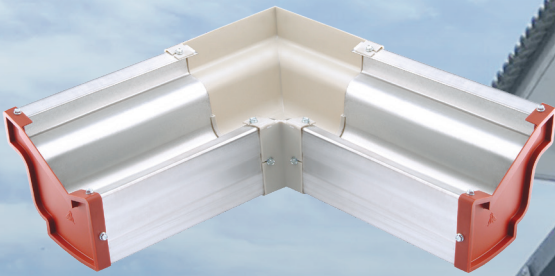

Ledex® Steel Gutter

Specification Drawing

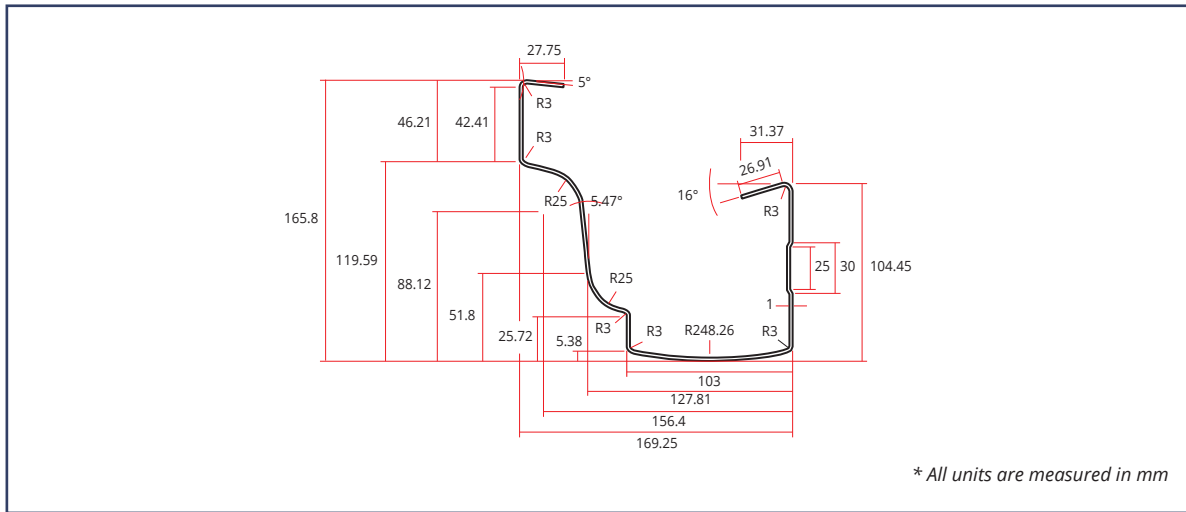

Profile	Ledex® Steel Gutter	
Dimension	169 mm (Width) x 165 mm (Height)	
Steel Grade	Zincalume G300 Steel	
Finishes	Zacs Natural, Primamaju, Zincalume, Colorbond	
Thickness (TCT)	0.36 mm	0.47 mm
Weight (kg/m)	1.85	2.06
Tolerance	Length ± 3 mm, Thickness ± 0.03 mm	

Ledex® Steel Gutter Bracket

Type A - Roofing Type B - Crimp Curve

Type C - Fascia / Wall

Material	Mild Steel
Thickness	3 mm

Installation of Ledex® Steel Gutter

Bracket 1.2 m Bracket

Steel Gutter

Gutter Corner Out Material: PVC

Gutter Cover (Left) Material: PVC

Gutter Spot Head Material: Stainless Steel

Gutter Corner In Material: PVC

Steel Gutter

Gutter Cover (Right) Material: PVC

PROJECT REFERENCE



Project Title: Chung Ling High School
Location : Ayer Itam, Penang



Project Title: SJK(c) Poi Chee
Location : Sungai Petani, Kedah



Project Title: Alia Residence
Location : Nibong Tebal, Penang

PROJECT REFERENCE



Project Title: Eco Meadows
Location : Simpang Ampat, Penang



Project Title: Eco World @ Eco Horizon
Location : Batu Kawan, Penang



Project Title: Taman Pengkalan Harmoni
Location : Taiping, Perak




Ledex® C&Z Purlin manufactured for a complete range of industrial buildings, commercial buildings and government infrastructures, in fact anywhere that strong, reliable steel framing is required. Made from quality zinc coating (min Z180), high tensile galvanized steel (min G450), Ledex® C & Z Purlin can be supplied plain or pre-punched holes, this is a fully integrated system allowing for flexible design options.

Galvanised Ledex® C & Z Purlin are manufactured from high tensile steel (min G450) and quality zinc coating (min Z180), for increased strength, reduced weight, and a long serviceable life. Ledex® Purlin are developed with significant improved durability to ensure a maximum degree of precision and consistency. Ledex® Purlin are cold roll-formed from high tensile zinc coated steel sheets, and are supplied in cut to length and pre-punched holes.

Due to its lightweight and the high strength of the steel and zinc coated corrosion protective surface, Ledex® Purlin are ready for immediate use upon delivery to site. The products produced are all in compliance to major international standards. The high tensile galvanized Ledex® Purlin are suitable for roofing, wall cladding supports and structural frames of buildings. Because of its lightweight, no heavy equipment is required to move them from one place to another, or during the fabrication of the structure.

Ledex[®] C & Z Purlin

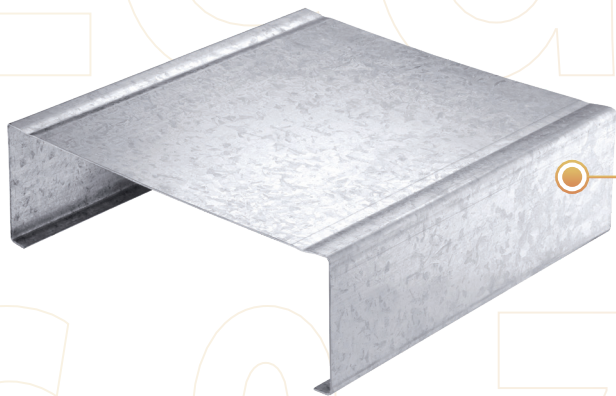

Ledex[®] C Purlin





Ledex[®] Z Purlin


WHERE CAN IT APPLY

- Mezzanine Floors
- Brickwork Restraints
- Vertical Sheeting Rails
- Suspended Ceiling System

Ledex® C & Z PURLIN

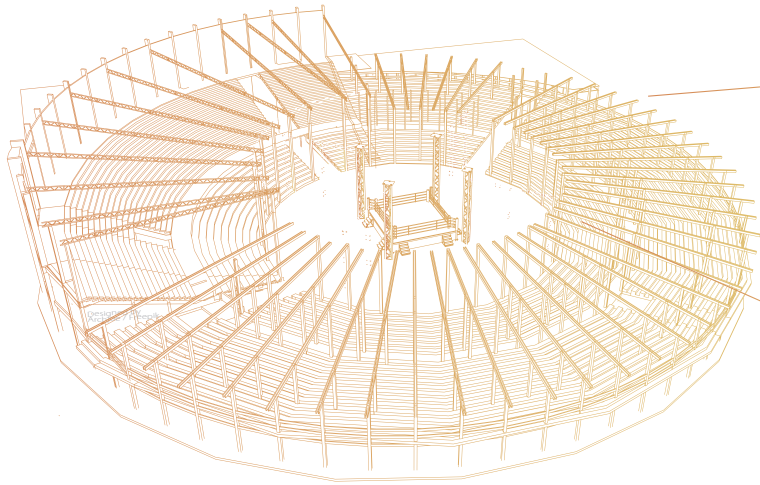

Ledex® C Purlin



Ledex® Z Purlin

BQ Specification





Example

Design, fabricate and install "Ledex® C Purlin LCP20030-75-Z275 reinforced with Ledex Bridging 25 X 55 to required bracket with associated fittings, bolts & nuts, with engineer's approval in accordance to manufacturer specifications.


Material Specifications

- Ledex® Purlin thickness comes in 4 types which are **1.6mm, 2.0mm, 2.5mm and 3.0mm**.
- Hot dip galvanized steel to JIS G 3302 or AS1397
- Zinc coating mass from min 180g/m² up to 275g/m²
- Hi-Tensile Grade G450 Minimum Yield Strength

We can custom according to customers' requirements.

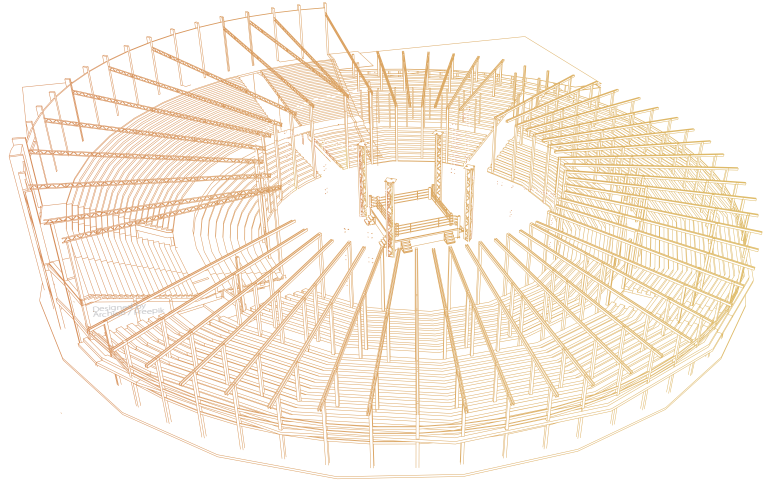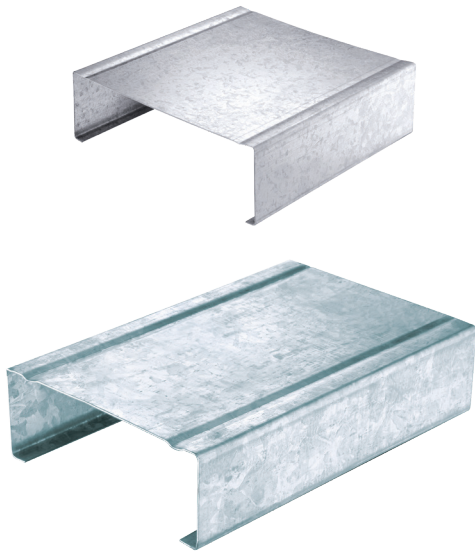


Specification Drawing



75 x 45	100 x 50	125 x 50	150 x 65	175 x 65	175 x 75	200 x 75	225 x 75	250 x 75	250 x 85	300 x 100	350 x 100
1.6 mm	1.6 mm	1.6 mm	1.6 mm	1.6 mm	1.6 mm	1.6 mm	1.6 mm	1.6 mm	1.6 mm	1.6 mm	1.6 mm
2.0 mm	2.0 mm	2.0 mm	2.0 mm	2.0 mm	2.0 mm	2.0 mm	2.0 mm	2.0 mm	2.0 mm	2.0 mm	2.0 mm
2.5 mm	2.5 mm	2.5 mm	2.5 mm	2.5 mm	2.5 mm	2.5 mm	2.5 mm	2.5 mm	2.5 mm	2.5 mm	2.5 mm
3.0 mm	3.0 mm	2.5 mm	3.0 mm	3.0 mm	3.0 mm	3.0 mm	3.0 mm	3.0 mm	3.0 mm	3.0 mm	3.0 mm


* All units are measured in mm

Available Measurements for Ledex[®] C Purlin

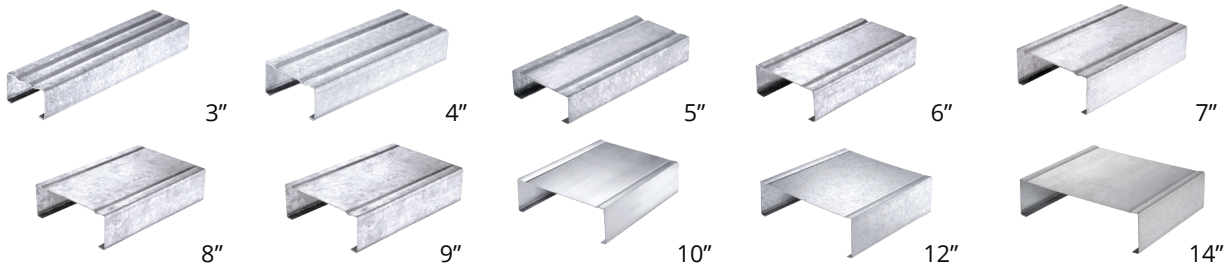

We can custom according to customers' requirements.

TECHNICAL SPECIFICATION

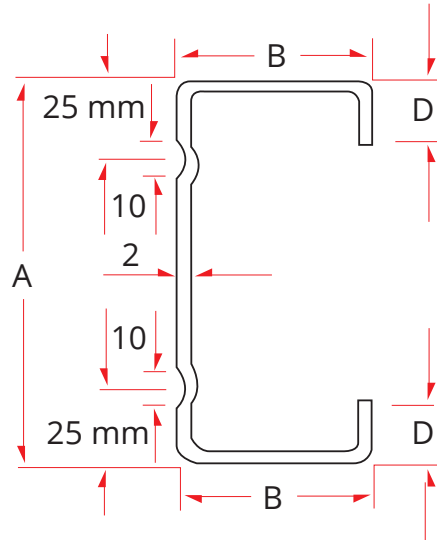

Inch	Codes				A (Depth)	B	D
3"	LCP 75 16	LCP 75 20	LCP 75 25	LCP 75 30	75	45	10
4"	LCP 100 16	LCP 100 20	LCP 100 25	LCP 100 30	100	50	12
5"	LCP 125 16	LCP 125 20	LCP 125 25	LCP 125 30	125	50	16
6"	LCP 150 16	LCP 150 20	LCP 150 25	LCP 150 30	150	65	16
7"	LCP 175 16	LCP 175 20	LCP 175 25	LCP 175 30	175	65/75	16
8"	LCP 200 16	LCP 200 20	LCP 200 25	LCP 200 30	200	75	18
9"	LCP 225 16	LCP 225 20	LCP 225 25	LCP 225 30	225	75	18
10"	LCP 250 16	LCP 250 20	LCP 250 25	LCP 250 30	250	75/85	18
12"	LCP 300 16	LCP 300 20	LCP 300 25	LCP 300 30	300	100	18
14"	LCP 350 16	LCP 350 20	LCP 350 25	LCP 350 30	350	100	20
TOLERANCE (mm)					± 1	± 1	± 2

Size	Thickness			
	1.6 mm	2.0 mm	2.5 mm	3.0 mm
1.5" x 3.0" (75 mm)	2.21 kg/m	2.75 kg/m	3.22 kg/m	3.82 kg/m
2.0" x 4.0" (100 mm)	2.80 kg/m	3.41 kg/m	4.24 kg/m	5.16 kg/m
2.0" x 5.0" (125 mm)	3.10 kg/m	3.82 kg/m	4.72 kg/m	5.69 kg/m
2.5" x 6.0" (150 mm)	3.85 kg/m	4.75 kg/m	5.94 kg/m	7.40 kg/m
2.5" x 7.0" (175 mm)	4.15 kg/m	5.10 kg/m	6.35 kg/m	7.75 kg/m
3.0" x 7.0" (175 mm)	4.43 kg/m	5.50 kg/m	6.84 kg/m	8.30 kg/m
3.0" x 8.0" (200 mm)	4.76 kg/m	5.90 kg/m	7.34 kg/m	9.09 kg/m
3.0" x 9.0" (225 mm)	5.18 kg/m	6.45 kg/m	8.02 kg/m	9.58kg/m
3.0" x 10.0" (250 mm)	5.38 kg/m	6.59 kg/m	8.35 kg/m	10.13kg/m
3.3" x 10.0" (250 mm)	5.67 kg/m	7.04 kg/m	8.76 kg/m	10.82 kg/m
4.0" x 12.0" (300 mm)	6.70 kg/m	8.33 kg/m	10.36 kg/m	12.80 kg/m
4.0" x 14.0" (350 mm)	7.47 kg/m	9.48 kg/m	11.85 kg/m	14.17 kg/m
TOLERANCE (mm)	± 0.10	± 0.10	± 0.10	± 0.10

C PURLIN SPECIFICATION & SECTION PROPERTIES

Inch	Identification	Wed H (mm)	Flange B (mm)	Thickness t (mm)	Lip Size L (mm)	Area mm ²	Weight kg/m	x mm	y mm	Ixx 106 mm ⁴	Iyy 106 mm ⁴	Zxx 103 mm ³	Zyy 103 mm ³	Rxx mm	Ryy mm
3"	LCP07516	75	45	1.6	10	286	2.21	15.82	37.5	0.271	0.078	7.213	2.684	30.77	16.56
	LCP07520	75	45	2.0	10	354	2.75	15.82	37.5	0.331	0.095	8.838	3.258	30.60	16.39
	LCP07525	75	45	2.5	10	438	3.22	15.82	37.5	0.404	0.115	10.774	3.925	30.39	16.18
4"	LCP07530	75	45	3.0	10	519	3.82	15.82	37.5	0.473	0.132	12.608	4.538	30.18	15.97
	LCP10016	100	50	1.6	12	348	2.80	16.55	50.0	0.571	0.119	11.414	3.548	40.49	18.46
	LCP10020	100	50	2.0	12	432	3.41	16.56	50.0	0.702	0.145	14.040	4.323	40.31	18.29
5"	LCP10025	100	50	2.5	12	535	4.24	16.57	50.0	0.860	0.175	17.201	5.233	40.09	18.08
	LCP10030	100	50	3.0	12	636	5.16	16.58	50.0	1.011	0.203	20.229	6.079	39.88	17.87
	LCP12516	125	50	1.6	12	388	3.10	14.93	62.5	0.954	0.128	15.258	3.638	49.57	18.13
6"	LCP12520	125	50	2.0	12	482	3.82	14.94	62.5	1.175	0.155	18.805	4.433	49.38	17.96
	LCP12525	125	50	2.5	12	598	4.72	14.96	62.5	1.443	0.188	23.094	5.368	49.15	17.74
	LCP12530	125	50	3.0	12	711	5.69	14.99	62.5	1.702	0.218	27.224	6.240	48.92	17.53
7"	LCP15016	150	65	1.6	16	489	3.85	20.26	75.0	2.187	0.346	29.165	7.737	59.98	23.86
	LCP15020	150	65	2.0	16	608	4.75	20.27	75.0	2.739	0.422	35.944	9.439	59.75	23.64
	LCP15025	150	65	2.5	16	755	5.94	20.29	75.0	3.189	0.494	42.525	11.054	59.53	23.43
8"	LCP15030	150	65	3.0	16	900	7.40	20.31	75.0	3.806	0.571	50.94	13.252	59.30	23.22
	LCP17516-65	175	65	1.6	15	526	4.15	18.5	87.5	2.509	0.290	28.68	5.666	69.08	23.48
	LCP17520-65	175	65	2.0	15	654	5.10	18.5	87.5	3.104	0.355	35.48	7.016	68.89	23.30
9"	LCP17525-65	175	65	2.5	15	813	6.35	18.6	87.5	3.830	0.433	43.77	8.532	68.66	23.08
	LCP17530-65	175	65	3.0	15	969	7.75	18.6	87.5	4.536	0.507	51.84	10.099	68.42	22.86
	LCP17516-75	175	75	1.6	16	561	4.43	22.53	87.5	2.766	0.419	31.616	7.989	70.22	27.34
10"	LCP17520-75	175	75	2.0	16	698	5.50	22.54	87.5	3.424	0.515	39.133	9.815	70.04	27.16
	LCP17525-75	175	75	2.5	16	868	6.84	22.56	87.5	4.228	0.630	48.317	12.006	69.81	26.94
	LCP17530-75	175	75	3.0	16	1035	8.30	22.58	87.5	5.011	0.739	57.267	14.099	69.58	26.72
11"	LCP20016	200	75	1.6	18	607	4.76	21.64	100.0	3.806	0.455	38.062	8.521	79.16	27.36
	LCP20020	200	75	2.0	18	756	5.90	21.66	100.0	4.715	0.559	47.151	10.474	78.97	27.18
	LCP20025	200	75	2.5	18	940	7.34	21.69	100.0	5.828	0.684	58.276	12.822	78.74	26.97
12"	LCP20030	200	75	3.0	18	1122	9.09	21.71	100.0	6.914	0.803	69.143	15.064	78.50	26.75
	LCP22516	225	75	1.6	18	647	5.18	20.36	112.5	5.004	0.471	44.481	8.620	87.92	26.97
	LCP22520	225	75	2.0	18	806	6.45	20.38	112.5	6.203	0.579	55.133	10.596	87.72	26.80
13"	LCP22525	225	75	2.5	18	1003	8.02	20.41	112.5	7.672	0.708	68.192	12.97	87.48	26.58
	LCP22530	225	75	3.0	18	1197	9.58	20.45	112.5	9.109	0.832	80.966	15.243	87.23	26.36
	LCP25016-75	250	75	1.6	17	684	5.38	19.0	125.0	6.367	0.476	50.94	9.647	96.47	26.37
14"	LCP25020-75	250	75	2.0	17	852	6.59	19.0	125.0	7.896	0.584	63.16	11.711	96.27	26.19
	LCP25025-75	250	75	2.5	17	1060	8.35	19.0	125.0	9.771	0.715	78.17	14.253	96.01	25.97
	LCP25030-75	250	75	3.0	17	1266	10.13	19.1	125.0	11.608	0.839	92.86	17.111	95.75	25.75
15"	LCP25016-85	250	85	1.6	18	719	5.67	22.65	125.0	6.898	0.658	55.183	10.559	97.92	30.25
	LCP25020-85	250	85	2.0	18	896	7.04	22.68	125.0	8.557	0.810	68.455	13.003	97.72	30.07
	LCP25025-85	250	85	2.5	18	1115	8.76	22.71	125.0	10.595	0.994	84.756	15.950	97.48	29.85
16"	LCP25030-85	250	85	3.0	18	1332	10.82	22.74	125.0	12.592	1.169	100.739	18.781	97.23	29.63
	LCP30016	300	100	1.6	18	847	6.70	25.47	150.0	11.642	1.034	77.615	13.869	117.22	34.93
	LCP30020	300	100	2.0	18	1056	8.33	25.50	150.0	14.459	1.275	96.391	17.111	117.01	34.74
17"	LCP30025	300	100	2.5	18	1315	10.36	25.53	150.0	17.927	1.567	119.514	21.039	116.76	34.52
	LCP30030	300	100	3.0	18	1575	12.80	25.56	150.0	21.338	1.849	142.253	24.832	116.40	34.26
	LCP35016	350	100	1.6	20	934	7.47	23.87	175.0	16.861	1.115	96.349	14.642	134.38	34.55
18"	LCP35020	350	100	2.0	20	1164	9.48	23.90	175.0	20.953	1.375	119.729	18.069	134.17	34.37
	LCP35025	350	100	2.5	20	1450	11.85	23.94	175.0	25.998	1.690	148.561	22.225	133.90	34.14
	LCP35030	350	100	3.0	20	1734	14.17	23.99	175.0	30.968	1.995	176.959	26.247	133.64	33.92

C PURLIN MAXIMUM ALLOWABLE SPAN (M)

The purlin load table is derived in accordance to BS5950 : Part 5 : 1987 "Code of practice for Design of Cold Formed Section" with maximum roof pitch 30° and roofing sheet distributed load 6.55 kg/m².

Size	C Purlin Spacing					
	0.9	1.2	1.5	1.8	2.1	2.4
75 x 45 x 1.6	3.8	3.5	3.2	3.0	2.9	2.7
75 x 45 x 2.0	4.1	3.7	3.4	3.2	3.1	2.9
75 x 45 x 2.5	4.4	4.0	3.7	3.5	3.3	3.1
75 x 45 x 3.0	4.6	4.2	3.9	3.6	3.5	3.3
100 x 50 x 1.6	5.1	4.6	4.3	4.0	3.8	3.7
100 x 50 x 2.0	5.5	5.0	4.6	4.3	4.1	3.9
100 x 50 x 2.5	5.9	5.3	4.9	4.6	4.4	4.2
100 x 50 x 3.0	6.2	5.6	5.2	4.9	4.7	4.5
125 x 50 x 1.6	6.1	5.5	5.1	4.8	4.6	4.4
125 x 50 x 2.0	6.5	5.9	5.5	5.2	4.9	4.7
125 x 50 x 2.5	7.0	6.3	5.9	5.5	5.3	5.0
125 x 50 x 3.0	7.4	6.7	6.2	5.8	5.6	5.3
150 x 65 x 1.6	7.5	6.8	6.3	5.9	5.6	5.4
150 x 65 x 2.0	8.0	7.3	6.8	6.4	6.0	5.8
150 x 65 x 2.5	8.5	7.8	7.3	6.8	6.5	6.2
150 x 65 x 3.0	9.1	8.3	7.7	7.2	6.9	6.6
175 x 65 x 1.6	8.4	7.6	7.1	6.7	6.3	6.1
175 x 65 x 2.0	9.0	8.2	7.6	7.2	6.8	6.5
175 x 65 x 2.5	9.7	8.8	8.2	7.7	7.3	7.0
175 x 65 x 3.0	10.3	9.3	8.6	8.1	7.7	7.4
175 x 75 x 1.6	8.7	7.9	7.3	6.9	6.5	6.3
175 x 75 x 2.0	9.3	8.5	7.9	7.4	7.0	6.7
175 x 75 x 2.5	10.0	9.1	8.4	7.9	7.5	7.2
175 x 75 x 3.0	10.6	9.6	8.9	8.4	8.0	7.6
200 x 75 x 1.6	9.7	8.8	8.1	7.7	7.3	7.0
200 x 75 x 2.0	10.4	9.4	8.8	8.2	7.8	7.5
200 x 75 x 2.5	11.2	10.1	9.4	8.8	8.4	8.0
200 x 75 x 3.0	11.8	10.7	10.0	9.4	8.9	8.5
225 x 75 x 1.6	10.6	9.6	8.9	8.4	8.0	7.6
225 x 75 x 2.0	11.4	10.3	9.6	9.0	8.6	8.2
225 x 75 x 2.5	12.2	11.1	10.3	9.7	9.2	8.8
225 x 75 x 3.0	13.0	11.8	10.9	10.3	9.8	9.3
250 x 75 x 1.6	11.5	10.4	9.7	9.1	8.6	8.3
250 x 75 x 2.0	12.3	11.2	10.4	9.8	9.3	8.9
250 x 75 x 2.5	13.2	12.0	11.2	10.5	10.0	9.5
250 x 75 x 3.0	13.9	12.8	11.8	11.1	10.6	10.1
250 x 85 x 1.6	11.8	10.7	9.9	9.4	8.9	8.5
250 x 85 x 2.0	12.7	11.5	10.7	10.1	9.6	9.1
250 x 85 x 2.5	13.6	12.4	11.5	10.8	10.3	9.8
250 x 85 x 3.0	14.4	13.1	12.2	11.4	10.9	10.4
300 x 100 x 1.6	14.1	12.8	11.9	11.1	10.6	10.1
300 x 100 x 2.0	15.1	13.7	12.7	12.0	11.4	10.9
300 x 100 x 2.5	16.2	14.8	13.7	12.9	12.2	11.7
300 x 100 x 3.0	17.2	15.6	14.5	13.7	13.0	12.4
350 x 100 x 1.6	15.9	14.5	13.4	12.6	12.0	11.5
350 x 100 x 2.0	17.1	15.5	14.4	13.6	12.9	12.3
350 x 100 x 2.5	18.4	16.7	15.5	14.6	13.9	13.2
350 x 100 x 3.0	19.5	17.7	16.4	15.5	14.7	14.0

(A) Design Loading

- (i) Dead Load: 0.06kN/m² (metal roofing) + purlin self weight
- (ii) Live Load: 0.25kN/m²

(B) Roof Pitch

- Application for maximum roof pitch 30°


(C) Support Condition

- Simply supported with pinned joints over supports


(D) Deflection Limits

- Span/150 under load case 1.0 DL + 1.0 LL
- Span/180 under load case 1.0 LL

Disclaimer: The information on the materials presented herein is provided for informational purposes only. Le Nam Megasheet (M) Sdn. Bhd. shall not liable for any loss or damage whatsoever arising from, but not limited to the usage of information provided. Any omission, errors, typographic errors and technical inaccuracies relating to the information may be changed or updated without notice.

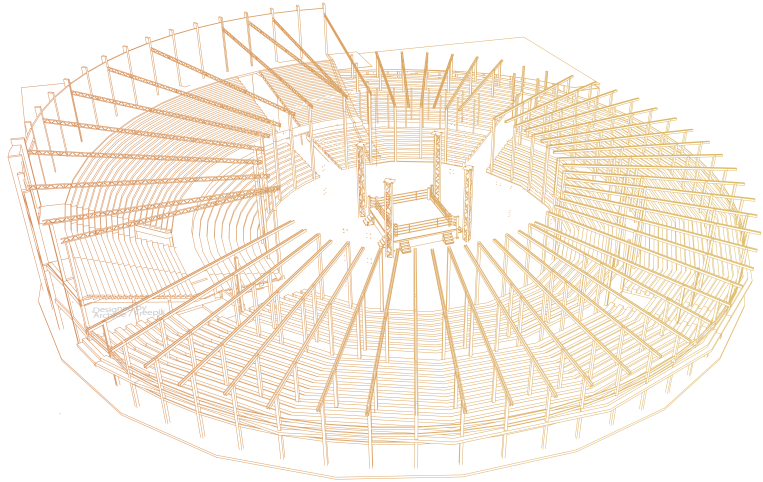


Specification Drawing

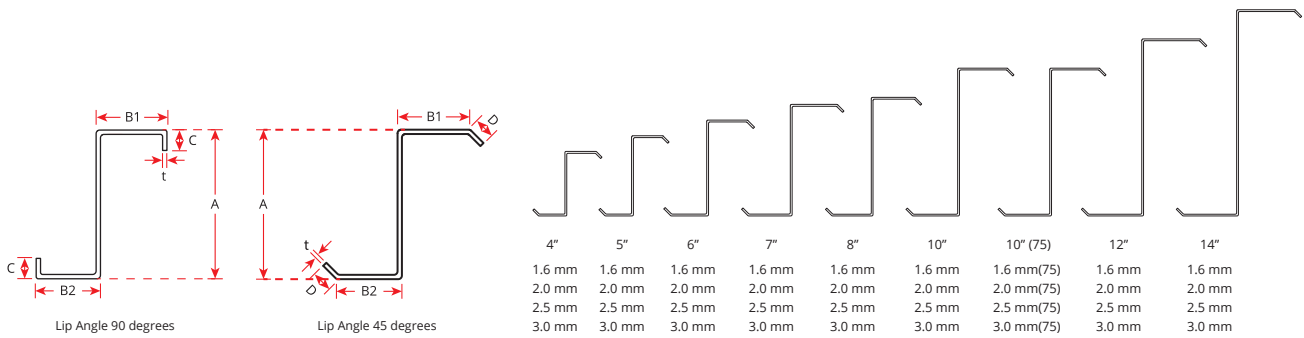


* All units are measured in mm

Available Measurements for Ledex[®] Z Purlin

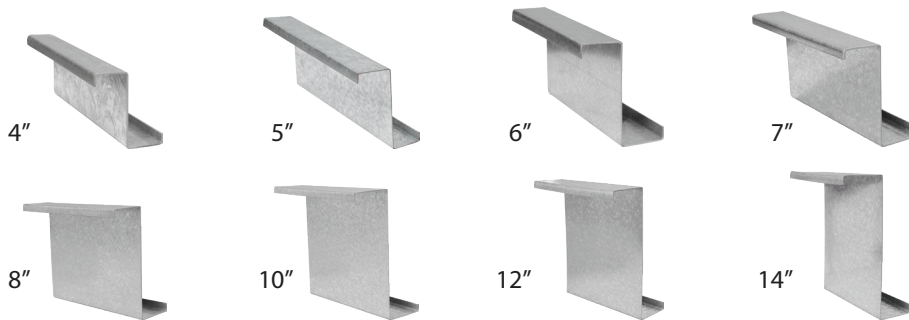

We can custom according to customers' requirements.

TECHNICAL SPECIFICATION

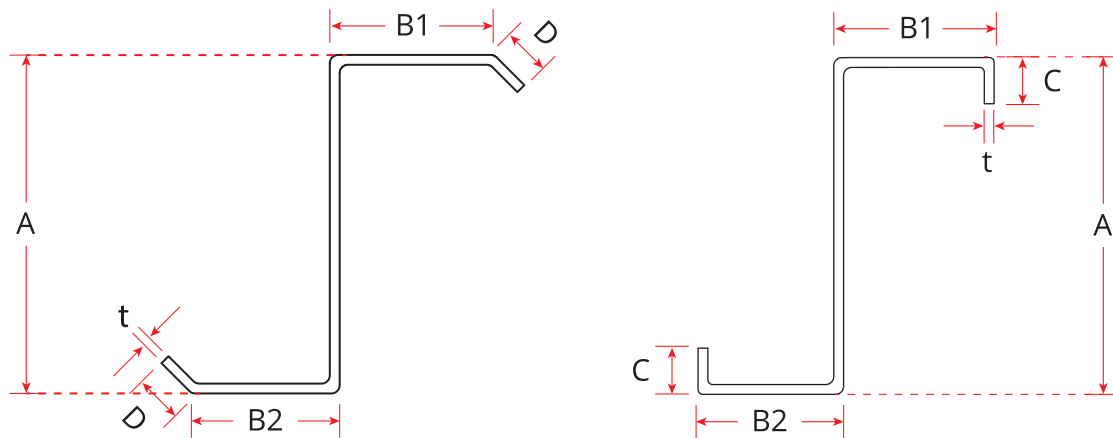

Inch	Codes				A (Depth)	B1	B2	D
4"	LZP 100 16	LZP 100 20	LZP 100 25	LZP 100 30	100	50	45	13
5"	LZP 125 16	LZP 125 20	LZP 125 25	LZP 125 30	125	50	45	14
6"	LZP 150 16	LZP 150 20	LZP 150 25	LZP 150 30	150	65	60	16
7"	LZP 175 16	LZP 175 20	LZP 175 25	LZP 175 30	175	75	70	15
8"	LZP 200 16	LZP 200 20	LZP 200 25	LZP 200 30	200	75	70	16
10"	LZP 250 16 (75)	LZP 250 20 (75)	LZP 250 25 (75)	LZP 250 30 (75)	250	75	70	16
10"	LZP 250 16 (85)	LZP 250 20 (85)	LZP 250 25 (85)	LZP 250 30 (85)	250	85	80	16
12"	LZP 300 16	LZP 300 20	LZP 300 25	LZP 300 30	300	100	95	16
14"	LZP 350 16	LZP 350 20	LZP 350 25	LZP 350 30	350	100	95	16
TOLERANCE (mm)					± 1	± 1	± 1	± 2

Size	Thickness			
	1.6 mm	2.0 mm	2.5 mm	3.0 mm
2.0" x 4.0" (100 mm)	2.80 kg/m	3.41 kg/m	4.24 kg/m	5.16 kg/m
2.0" x 5.0" (125 mm)	3.10 kg/m	3.82 kg/m	4.72 kg/m	5.69 kg/m
2.5" x 6.0" (150 mm)	3.85 kg/m	4.75 kg/m	5.94 kg/m	7.40 kg/m
3.0" x 7.0" (175 mm)	4.43 kg/m	5.50 kg/m	6.84 kg/m	8.30 kg/m
3.0" x 8.0" (200 mm)	4.76 kg/m	5.90 kg/m	7.34 kg/m	9.09kg/m
3.0" x 10.0"(250 mm)	5.38 kg/m	6.59 kg/m	8.35 kg/m	10.13kg/m
3.3" x 10.0"(250 mm)	5.67 kg/m	7.04 kg/m	8.76 kg/m	10.82 kg/m
4.0" x 12.0"(300 mm)	6.70 kg/m	8.33 kg/m	10.36 kg/m	12.80 kg/m
4.0" x 14.0"(350mm)	7.47 kg/m	9.48 kg/m	11.85 kg/m	14.17 kg/m
TOLERANCE (mm)	± 0.10	± 0.10	± 0.10	± 0.10

Z PURLIN SPECIFICATION & SECTION PROPERTIES

Inch	Identification	Area, A (mm ²)	Weight, W (kg/m)	Web, D (mm)	Flange, B1 (mm)	Flange, B2 (mm)	Lip Size L (mm)	Thickness, t (mm)	Second Moment of Area I _{xx} (10 ⁶ mm ⁴)	I _{yy} (10 ⁶ mm ⁴)	Z _{xx} (10 ³ mm ³)	Z _{yy} (10 ³ mm ³)	Section Modulus Z _{xx} (10 ³ mm ³)	Z _{yy} (10 ³ mm ³)	Radius of Gyration R _{xx} (mm)	R _{yy} (mm)
4"	LZP10016	346	2.80	100	50	45	13	1.6	0.567	0.212	11.27	4.08	11.27	4.08	40.47	24.74
	LZP10020	431	3.41	100	50	45	13	2.0	0.700	0.260	13.95	5.04	13.95	5.04	40.30	24.58
	LZP10025	535	4.24	100	50	45	13	2.5	0.860	0.318	17.23	6.20	17.23	6.20	40.09	24.38
	LZP10030	638	5.16	100	50	45	13	3.0	1.014	0.373	20.43	7.32	20.43	7.32	39.88	24.17
5"	LZP12516	390	3.10	125	50	45	14	1.6	0.957	0.222	15.19	4.23	15.19	4.23	49.56	23.87
	LZP12520	485	3.82	125	50	45	14	2.0	1.182	0.273	18.83	5.23	18.83	5.23	49.39	23.71
	LZP12525	602	4.72	125	50	45	14	2.5	1.456	0.333	23.29	6.44	23.29	6.44	49.17	23.51
	LZP12530	719	5.69	125	50	45	14	3.0	1.722	0.391	27.66	7.60	27.66	7.60	48.96	23.32
6"	LZP15016	484	3.85	150	65	60	16	1.6	1.753	0.472	23.25	6.93	23.25	6.93	60.19	31.24
	LZP15020	603	4.75	150	65	60	16	2.0	2.171	0.582	28.86	8.58	28.86	8.58	60.02	31.08
	LZP15025	750	5.94	150	65	60	16	2.5	2.682	0.715	35.77	10.60	35.77	10.60	59.80	30.88
	LZP15030	896	7.40	150	65	60	16	3.0	3.180	0.843	42.55	12.57	42.55	12.57	59.59	30.68
7"	LZP17516	553	4.43	175	75	70	15	1.6	2.724	0.664	30.97	8.54	30.97	8.54	70.19	34.66
	LZP17520	689	5.50	175	75	70	15	2.0	3.377	0.820	38.48	10.58	38.48	10.58	70.02	34.50
	LZP17525	857	6.84	175	75	70	15	2.5	4.177	1.009	47.74	13.08	47.74	13.08	69.80	34.30
	LZP17530	1025	8.30	175	75	70	15	3.0	4.961	1.191	56.86	15.53	56.86	15.53	69.59	34.10
8"	LZP20016	596	4.76	200	75	70	16	1.6	3.728	0.686	37.09	8.77	37.09	8.77	79.09	33.92
	LZP20020	743	5.90	200	75	70	16	2.0	4.625	0.847	46.10	10.86	46.10	10.86	78.92	33.76
	LZP20025	925	7.34	200	75	70	16	2.5	5.728	1.042	57.23	13.44	57.23	13.44	78.70	33.57
	LZP20030	1106	9.09	200	75	70	16	3.0	6.809	1.231	68.20	15.95	68.20	15.95	78.48	33.37
10"	LZP25016	676	5.38	250	75	70	16	1.6	6.272	0.686	49.91	8.64	49.91	8.64	96.33	31.86
	LZP25020	843	6.59	250	75	70	16	2.0	7.789	0.847	62.08	10.85	62.08	10.85	96.14	31.70
	LZP25025	1050	8.35	250	75	70	16	2.5	9.658	1.042	77.13	13.42	77.13	13.42	95.91	31.51
	LZP25030	1256	10.13	250	75	70	16	3.0	11.495	1.231	91.98	15.93	91.98	15.93	95.68	31.31
10"	LZP25016	708	5.67	250	85	80	16	1.6	6.766	0.955	53.87	10.82	53.87	10.82	97.76	36.73
	LZP25020	887	7.04	250	85	80	16	2.0	8.404	1.181	67.02	13.42	67.02	13.42	97.36	36.49
	LZP25025	1100	8.76	250	85	80	16	2.5	10.423	1.455	83.28	16.61	83.28	16.61	97.35	36.37
	LZP25030	1316	10.82	250	85	80	16	3.0	12.410	1.722	99.35	19.74	99.35	19.74	97.13	36.18
12"	LZP30016	836	6.70	300	100	95	16	1.6	11.442	1.477	75.96	14.30	75.96	14.30	116.99	42.04
	LZP30020	1043	8.33	300	100	95	16	2.0	14.227	1.829	94.57	17.75	94.57	17.75	116.81	41.88
	LZP30025	1300	10.36	300	100	95	16	2.5	17.666	2.258	117.63	22.00	117.63	22.00	116.58	41.68
	LZP30030	1556	12.80	300	100	95	16	3.0	21.059	2.677	140.46	26.19	140.46	26.19	116.35	41.49
14"	LZP35016	916	7.47	350	100	95	16	1.6	16.422	1.477	93.45	14.28	93.45	14.28	133.90	40.16
	LZP35020	1143	9.48	350	100	95	16	2.0	20.429	1.829	116.39	17.74	116.39	17.74	133.71	40.01
	LZP35025	1425	11.85	350	100	95	16	2.5	25.384	2.259	144.83	21.99	144.83	21.99	133.48	39.81
	LZP35030	1706	14.17	350	100	95	16	3.0	30.279	2.678	173.00	26.16	173.00	26.16	133.24	39.62

Z PURLIN MAXIMUM ALLOWABLE SPAN (M)

Size	Z Purlin Spacing					
	0.9	1.2	1.5	1.8	2.1	2.4
100 x 50 x 1.6	5.1	4.6	4.3	4.0	3.8	3.7
100 x 50 x 2.0	5.5	5.0	4.6	4.3	4.1	3.9
100 x 50 x 2.5	5.9	5.3	4.9	4.6	4.4	4.2
100 x 50 x 3.0	6.2	5.6	5.2	4.9	4.7	4.5
125 x 50 x 1.6	6.1	5.5	5.1	4.8	4.6	4.4
125 x 50 x 2.0	6.5	5.9	5.5	5.2	4.9	4.7
125 x 50 x 2.5	7.0	6.4	5.9	5.6	5.3	5.0
125 x 50 x 3.0	7.4	6.7	6.2	5.9	5.6	5.3
150 x 65 x 1.6	7.5	6.8	6.3	5.9	5.6	5.4
150 x 65 x 2.0	8.0	7.3	6.7	6.3	6.0	5.8
150 x 65 x 2.5	8.6	7.8	7.2	6.8	6.5	6.2
150 x 65 x 3.0	9.1	8.3	7.7	7.2	6.9	6.6
175 x 75 x 1.6	8.6	7.8	7.3	6.9	6.5	6.2
175 x 75 x 2.0	9.3	8.4	7.8	7.4	7.0	6.7
175 x 75 x 2.5	10.0	9.1	8.4	7.9	7.5	7.2
175 x 75 x 3.0	10.6	9.6	8.9	8.4	8.0	7.6
200 x 75 x 1.6	9.6	8.7	8.1	7.6	7.2	6.9
200 x 75 x 2.0	10.0	9.4	8.7	8.2	7.8	7.4
200 x 75 x 2.5	11.1	10.1	9.3	8.8	8.3	8.0
200 x 75 x 3.0	11.8	10.7	9.9	9.3	8.8	8.5
250 x 75 x 1.6	11.5	10.4	9.7	9.1	8.6	8.3
250 x 75 x 2.0	12.3	11.2	10.4	9.8	9.3	8.9
250 x 75 x 2.5	13.2	12.0	11.2	10.5	10.0	9.5
250 x 75 x 3.0	13.9	12.8	11.8	11.1	10.6	10.1
250 x 85 x 1.6	11.4	10.4	9.6	9.1	8.6	8.2
250 x 85 x 2.0	12.3	11.2	10.3	9.7	9.3	8.8
250 x 85 x 2.5	13.2	12.0	11.1	10.5	9.9	9.5
250 x 85 x 3.0	14.0	12.7	11.8	11.1	10.5	10.1
300 x 100 x 1.6	14.0	12.7	11.8	11.1	10.5	10.1
300 x 100 x 2.0	15.0	13.7	12.7	11.9	11.3	10.8
300 x 100 x 2.5	16.2	14.7	13.6	12.8	12.2	11.6
300 x 100 x 3.0	17.1	15.6	14.4	13.6	12.9	12.3
350 x 100 x 1.6	15.8	14.3	13.3	12.5	11.9	11.4
350 x 100 x 2.0	17.0	15.4	14.3	13.5	12.8	12.2
350 x 100 x 2.5	18.2	16.6	15.4	14.5	13.7	13.1
350 x 100 x 3.0	19.4	17.6	16.3	15.4	14.6	13.9

(A) Design Loading

- (i) Dead Load: 0.06kN/m² (metal roofing) + purlin self weight
- (ii) Live Load: 0.25kN/m²

(B) Roof Pitch

- Application for maximum roof pitch 30°

(C) Support Condition



- Simply supported with pinned joints over supports

(D) Deflection Limits


- Span/150 under load case 1.0 DL + 1.0 LL
- Span/180 under load case 1.0 LL

Disclaimer: The information on the materials presented herein is provided for informational purposes only. Le Nam Megasheet (M) Sdn. Bhd. shall not liable for any loss or damage whichsoever arising from, but not limited to the usage of information provided. Any omission, errors, typographic errors and technical inaccuracies relating to the information may be changed or updated without notice.


PUNCH HOLE GUIDELINE

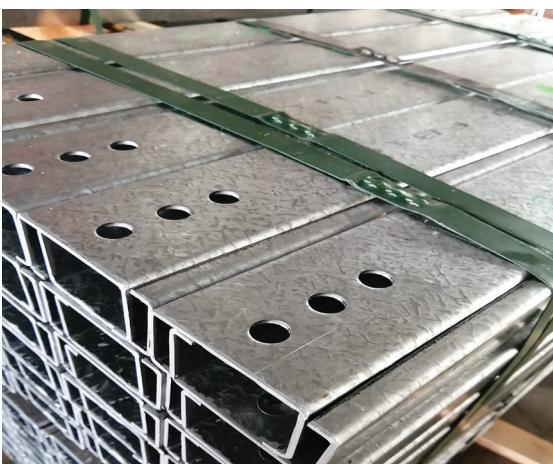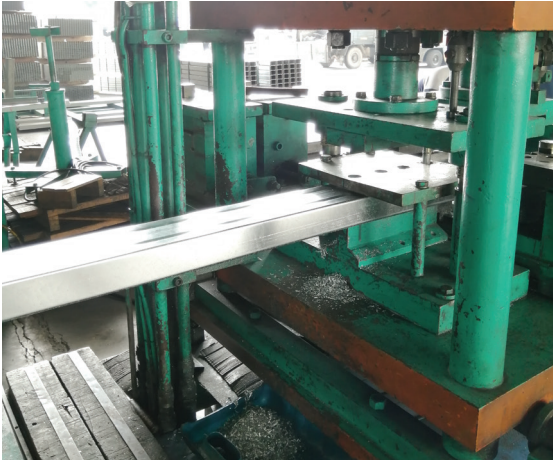

C Purlin

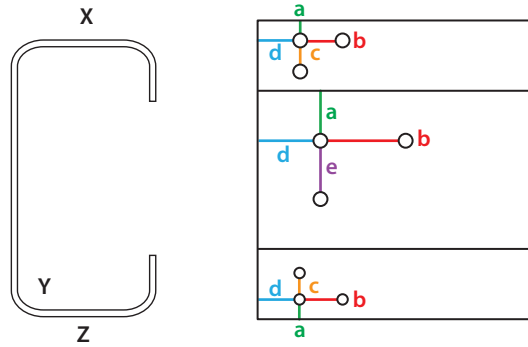

Z Purlin

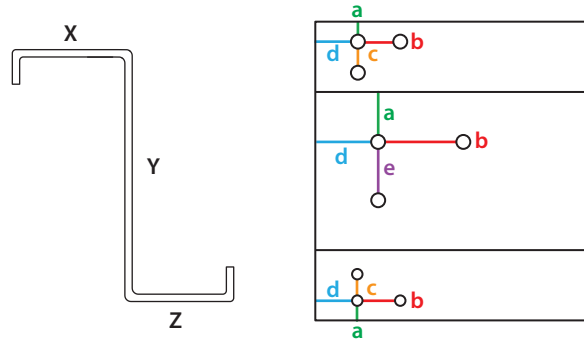


Height H (mm)	14mm					14mm x 16mm					17mm x 19mm					
	Round Hole Size					Standard Elongated Hole Size					Option Elongated Hole Size					
	a	b	c	d	e	a	b	c	d	e	a	b	c	d	e	
3"	75	12	19	19	12	19	12	21	19	13	19	14	24	22	15	24
4"	100	12	19	19	12	19	12	21	19	13	19	14	24	22	15	24
5"	125	12	19	19	12	19	12	21	19	13	19	14	24	22	15	24
6"	150	12	19	19	12	19	12	21	19	13	19	14	24	22	15	24
7"	175	12	19	19	12	19	12	21	19	13	19	14	24	22	15	24
8"	200	12	19	19	12	19	12	21	19	13	19	14	24	22	15	24
9"	225	12	19	19	12	19	12	21	19	13	19	14	24	22	15	24
10"	250	12	19	19	12	19	12	21	19	13	19	14	24	22	15	24
12"	300	12	19	19	12	19	12	21	19	13	19	14	24	22	15	24
14"	350	12	19	19	12	19	12	21	19	13	19	14	24	22	15	24


Height H (mm)	18mm					18mm x 22mm					14mm x 22mm					
	Round Hole Size					Option Elongated Hole Size					Option Elongated Hole Size					
	a	b	c	d	e	a	b	c	d	e	a	b	c	d	e	
3"	75	14	23	23	14	23	14	27	23	16	23	12	27	19	16	19
4"	100	14	23	23	14	23	14	27	23	16	23	12	27	19	16	19
5"	125	14	23	23	14	23	14	27	23	16	23	12	27	19	16	19
6"	150	14	23	23	14	23	14	27	23	16	23	12	27	19	16	19
7"	175	14	23	23	14	23	14	27	23	16	23	12	27	19	16	19
8"	200	14	23	23	14	23	14	27	23	16	23	12	27	19	16	19
9"	225	14	23	23	14	23	14	27	23	16	23	12	27	19	16	19
10"	250	14	23	23	14	23	14	27	23	16	23	12	27	19	16	19
12"	300	14	23	23	14	23	14	27	23	16	23	12	27	19	16	19
14"	350	14	23	23	14	23	14	27	23	16	23	12	27	19	16	19

HOLE PUNCHING DIMENSION


C Purlin Specification Drawing

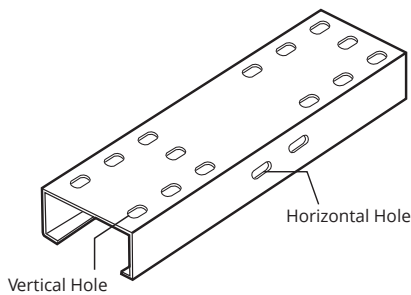


* Hole can be either horizontally or vertically punched
* Custom made position & hole size are also available




Size : 9mm x 9mm
Round Hole Size




Size : 12mm x 12mm
Round Hole Size




Size : 14mm x 14mm
Round Hole Size




Size : 18mm x 18mm
Round Hole Size




Size : 14mm x 16 mm
Standard Elongated
Hole Size



Size : 17mm x 19mm
Option Elongated
Hole Size




Size : 18mm x 22mm
Other Elongated
Hole Size




Size : 14mm x 22mm
Option Elongated
Hole Size


Z Purlin Specification Drawing

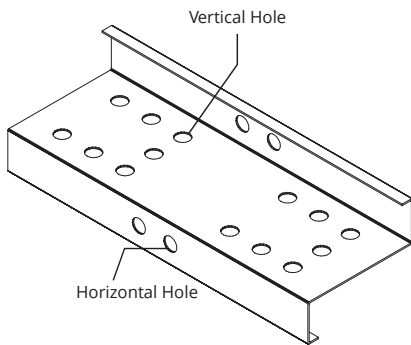


* Hole can be either horizontally or vertically punched
* Custom made position & hole size are also available




Size : 9mm x 9mm
Round Hole Size




Size : 12mm x 12mm
Round Hole Size




Size : 14mm x 14mm
Round Hole Size




Size : 18mm x 18mm
Round Hole Size




Size : 14mm x 16 mm
Standard Elongated
Hole Size



Size : 17mm x 19mm
Option Elongated
Hole Size




Size : 18mm x 22mm
Other Elongated
Hole Size




Size : 14mm x 22mm
Option Elongated
Hole Size


Example

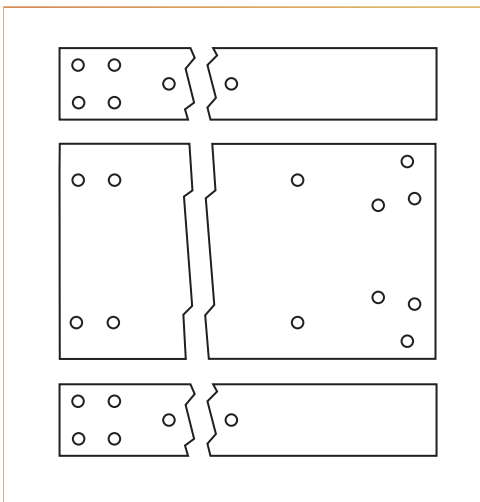

C Purlin


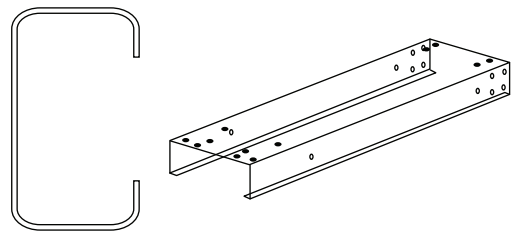


Z Purlin

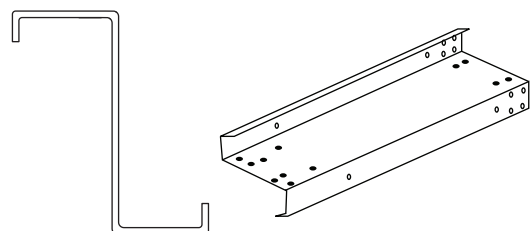


ACCESSORIES & SPECIFICATIONS

Ledex® Purlin Connector

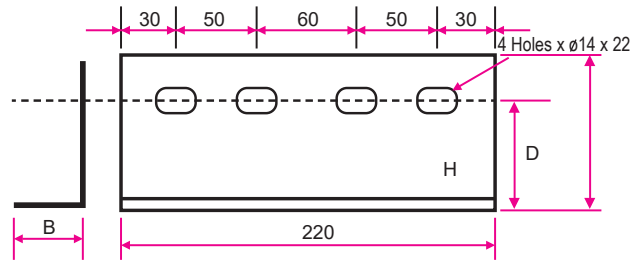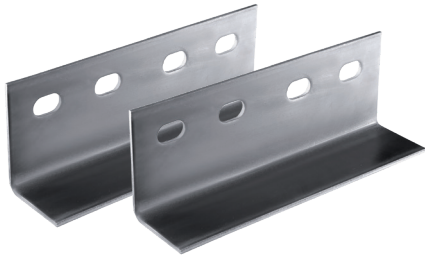


* All units are measured in mm

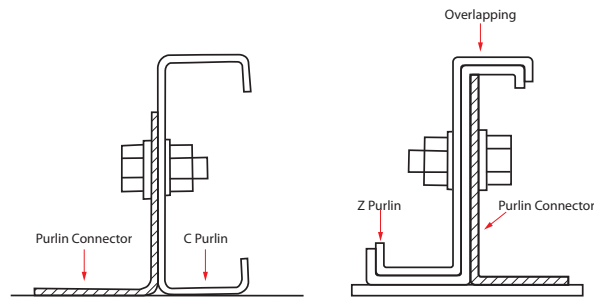

C Purlin Height (mm)	Base B (mm)	Height H (mm)	Hole Distance D (mm)	Thickness (mm)	Weight (kg)	Materials
75	51	63.5	38.5	4.0	0.60	Mild Steel
100	65.5	76	51	4.0	0.90	Mild Steel
125	63.5	89	63.5	4.0	1.00	Mild Steel
150	76	102	76	4.0	1.05	Mild Steel
175	76	114	88.5	4.0	1.10	Mild Steel
200	89	127	101	4.0	1.40	Mild Steel
225	101	137	112	4.0	1.80	Mild Steel
250	110	150	127	4.0	1.90	Mild Steel


Ledex® Tie Rod

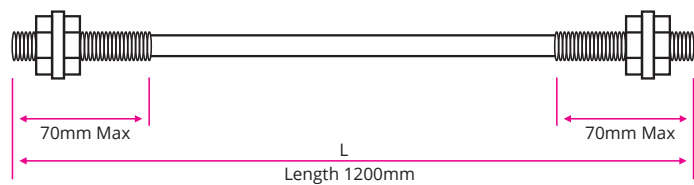


Profile	Ledex® Tie Rod
Size	12 mm
Thread Length	70 mm Max
Standard Length	1200 mm

PURLIN BRIDGING

Ledex® Purlin Bridging

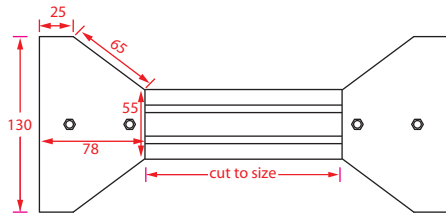


* All units are measured in mm

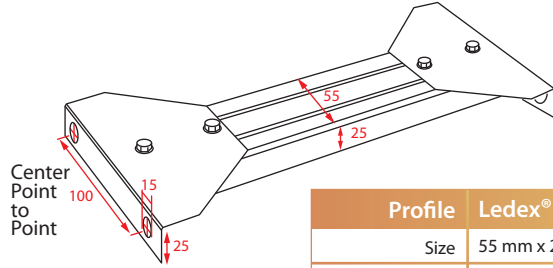


Profile	Ledex® Purlin Bridging
Size	55 mm x 25 mm
Standard Length	1200 mm


Ledex® Z Purlin Horizontal

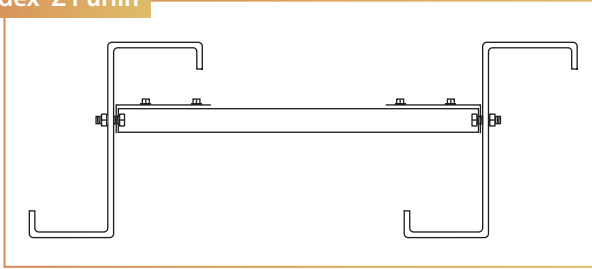


Horizontal Ledex® C Purlin

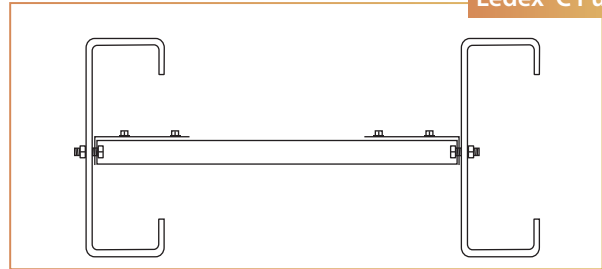


Ledex® Z Purlin Vertical

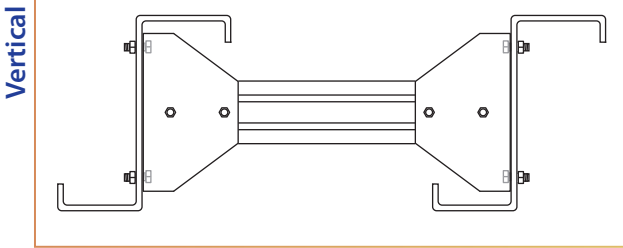


Ledex® C Purlin Vertical

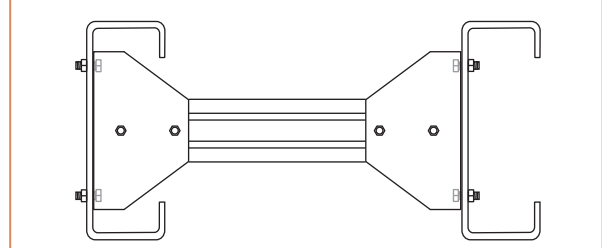


Z PURLIN INSTALLATION

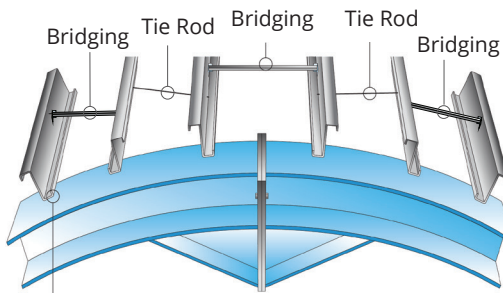


Alternative purlin directions reversed when roof tangent is less than 3°

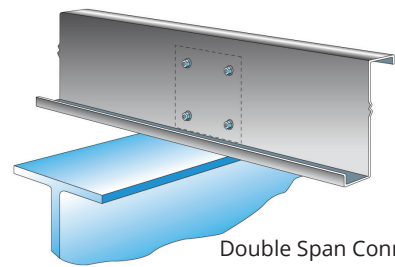


Double Span Connection

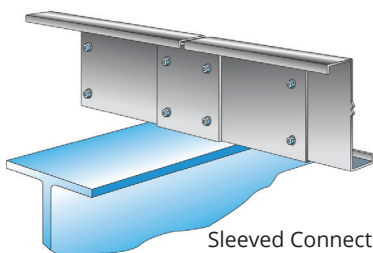

Sleeved Connection

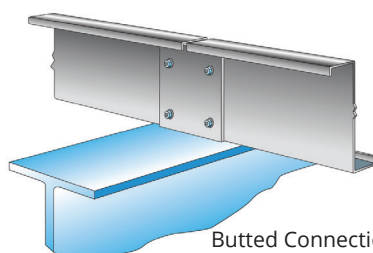

Butted Connection



Butted Connection with inset cleat for flush construction

PROJECT REFERENCE



Project Title: Ultra Clean Technology
Location : Batu Kawan, Penang



Project Title: Kellogg's Malaysia
Location : Bandar Baru Enstek, Negeri Sembilan



Project Title: Le Nam Megashop (M) KL Branch
Location : Serendah, Selangor

PROJECT REFERENCES



Project Title: Thirupathi
Location : Prai, Penang



Project Title: DIY Channel
Location : Batu Kawan, Penang



Project Title: Inventec Electronic Factory
Location : Bayan Lepas, Penang

Ledex® Floor Deck is the next generation composite steel deck that combines the tensile strength of steel with compressive strength of concrete. This is to improve design efficiency with minimal use of concrete. Hence, this enables a new benchmark for more shallow and efficient concrete slab construction. Ledex® Floor Deck increases the speed of floor construction and provides a safe working platform to enable low interruption during construction. It requires low maintenance and gives lightweight building a longer life span.


It has a structurally efficient ribbed profile that provides an excellent interlock between steel and concrete. This creates a positive reinforcement to maximize load capacity. The efficient shape of the deck is an ideal choice for composite slab construction.

There are two types of floor deck available for different building structure. **Ledex® Mega Floor Deck**, a corrugated steel sheet supported by steel joints or beams. It creates high strength-to-weight that incurred lower material cost and handling time while maintaining the durability. It offers wide range steel decking solutions for multi-rise buildings.


Ledex® Giga Floor Deck is precisely engineered with stucco design on the trapzoidel rib face, directly contribute to the concrete bonding with the corrugated rib, hence provide strong bonding between concrete and steel.



Ledex[®] Floor Deck

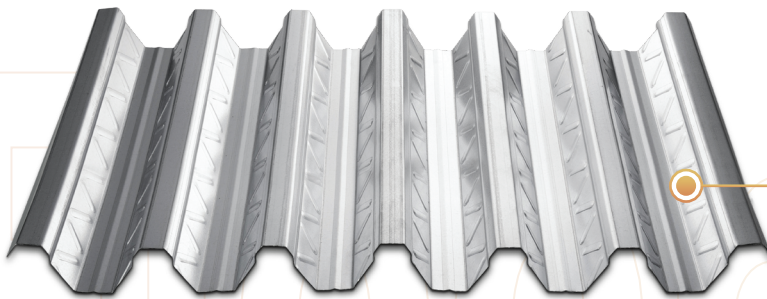

Ledex[®] Mega Floor Deck


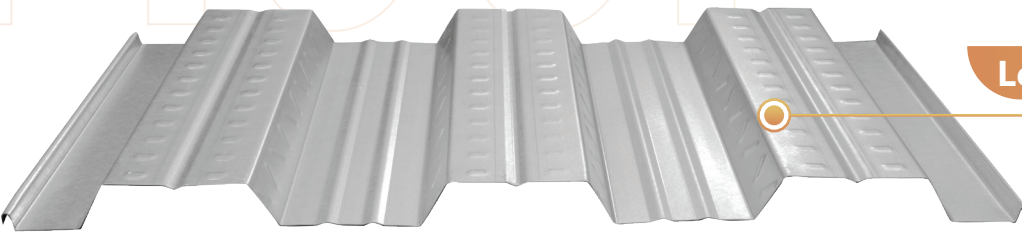


Ledex[®] Giga Floor Deck

WHERE CAN IT APPLY

- Warehouse
- Car Porches
- Parking Garages
- Bridge Walkways
- Multi-storey Buildings
- Mezzanines Floor

Ledex® Floor Deck

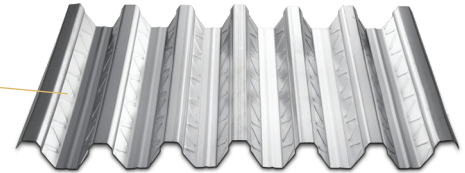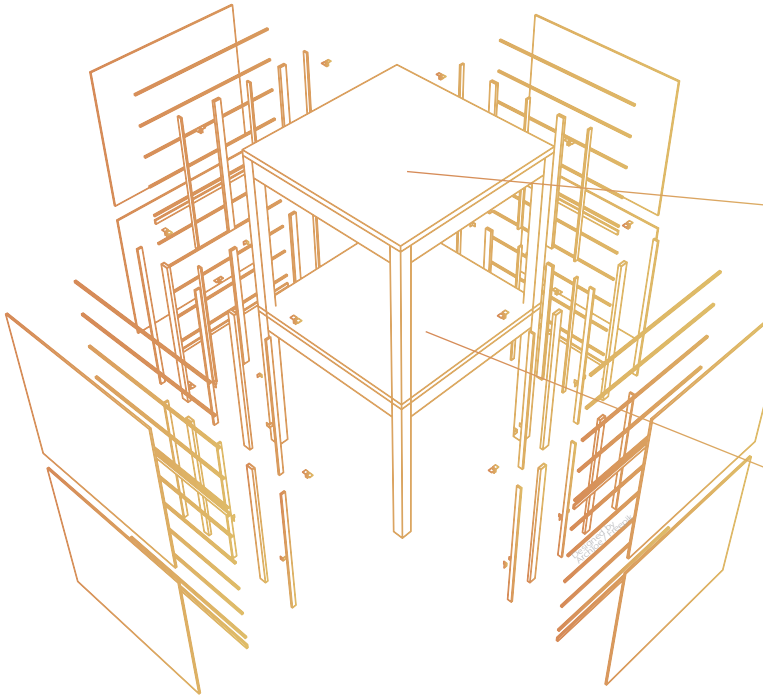

Ledex® Mega Floor Deck



Ledex® Giga Floor Deck

BQ Specification

Ledex® Mega Floor Deck Z180 0.8mm TCT



Example

Design, fabricate & install Ledex® Mega Floor Deck GI Z275, 1.00 mm TCT reinforced with shear stud, BRC to required with engineer's approval associated edge cappings design in accordance to manufacturer specifications.



Certified Bomba with Class 'O' Certificate

ADVANTAGES OF INSTALLING LEDEX® FLOOR DECK

1. Low Material Cost

Ledex® Floor Deck's composite has high strength to weight ratio. The lighter weight composite material reduces the steel works frame weight and the ribbed profile shape reduces the concrete volume. As a result, delivery, erection and structural framing costs can be lower. This is not only used as formwork purpose but also serves as wide working platform, thus decreases the period of construction.

2. Reduce Construction Time and Cost

Ledex® Floor Deck can be easily cut, joined and fitted to any required shapes. Laying and reinforcing the deck are combined to a single stage. The low weight deck can be laid by hand and not by crane. Shorter construction stages and reduced dependency of heavy machines helps to speed up construction time. Since there is no wooden formwork support needed, it produces no assembly waste.

3. Greater Durability with Improved Quality and Realibility

Ledex® offers excellent quality through engineering and continuously refined production techniques. The steel base has superior corrosion protection with guaranteed minimum yield strength depending on the specification used. The long sustainability of steel can offer low maintenance cost over time.

4. Unbeatable Strength

When the steel and concrete composite slabs are constructed, they are lighter and stronger than most conventional slabs. Steel floor decking provides flexible reinforcement, combined with the comprehensive strength of the concrete, for an all-round stronger slab. The steel floor decking profiles are designed to inhibit any longitudinal slip between the steel and concrete in the slab itself, and any transverse movement between the slab and the supporting beams.

5. Easy On-Site Handling

Steel floor decking is transported to site in pre-cut lengths, and in pre-packaged bundles. These bundles can be easily craned into specific work areas, and the individual sheets quickly laid by hand.

6. Speedy, Safe Construction

One advantage of metal deck steel flooring is its speedy erection. Another is that as the concrete slab is being poured, progress is not hindered in other areas e.g. the floors above. The floor deck is also able to offer stud welding and concrete flooring constructor services allowing the entire installation of the concrete slab to be undertaken by one skilled and experienced provider.

7. More Flexible Design

Steel floor decking can be varied in design and will give more strength, flexibility and efficiency.

8. Much Better Longevity

Steel floor decking will not twist and warp over time and is resilient to weather, moisture, time and pest deterioration.


COMPARISON OF LEDEX[®] FLOOR DECK AND TRADITIONAL WOODEN MOULD

Ledex[®] Floor Deck


- Increase construction speed and less workers are required to complete the same construction.
- Construction can be completed in a shorter time in any different floors at the same time.
- No need to consider for formwork removal prematurely without affecting template.
Less floor crack seepage happening
- because better floor quality.
Do not need formwork support.
- Consecutive floor level can be carried out immediately.
Reduce the accumulation of material
- on-site (Reduce wooden materials stacking on job site), work safety and good health.

Traditional Wooden Mould

- Construction is slow. More workers are required to complete the same construction.
Construction cannot be completed in a
- shorter time in any different floors at the same time.
Need to consider for formwork removal
- prematurely. Thus the floor cracks easily, resulting in seepage.
The working platform can be dispensed
- with and the need of crane for internal transport maybe reduced significantly.
Increase the accumulation of material
- on-site (Increase wooden materials stacking on job site, site dirty, prone to danger).

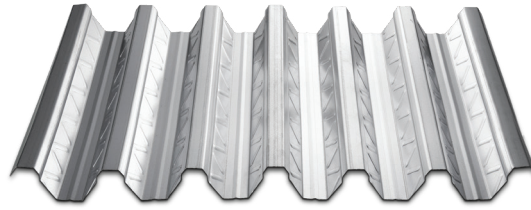

Specification Drawing

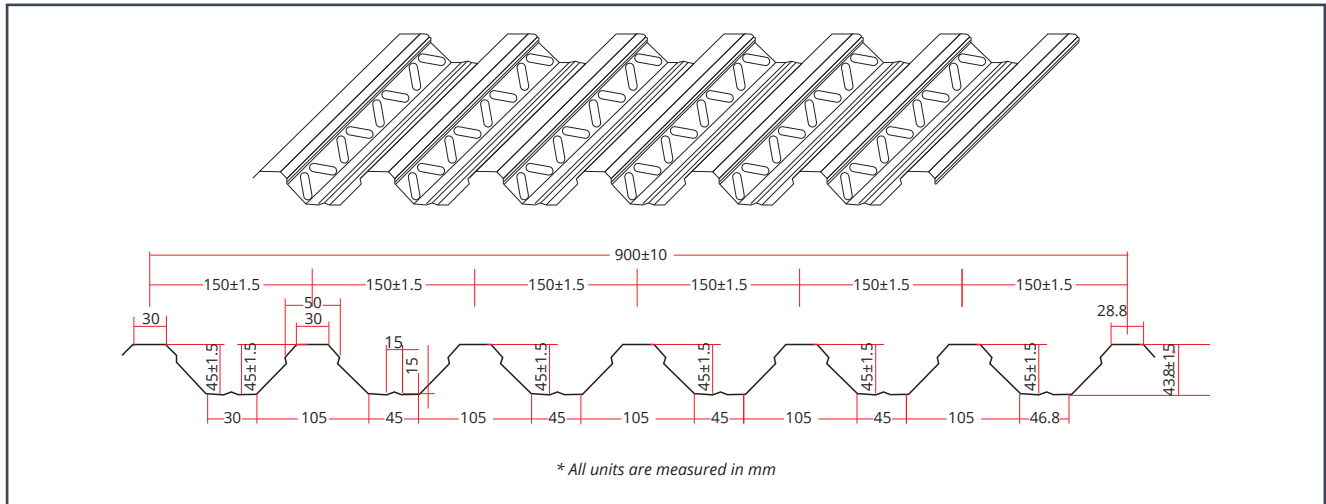

Product Specification

Profile		Ledex® Mega Floor Deck	
Effective Width		900 mm	
Steel Grade		Hot Dip Galvanized High Tensile Steel with Minimum Yield Strength of 550Mpa	
Zinc Coating Mass		180g/m ² , 275g/m ²	
Tolerance		Length ±10 mm, Width ±10 mm, Thickness ±0.03 mm	
Thickness TCT (mm)		0.8	1.0
Weight	(kg/m)	8.80	10.35
	(kg/m ²)	9.78	11.50
Steel Area (mm ² /m)		978.59	1219.24
Second Moment of area I _{NA} (mm ⁴ /m)		295938	368161
Height to Neutral Axis \bar{y} (mm)		20.22	20.16
Moment Capacity M _c (kNm/m)		43.34	55.55

Maximum Un-Propped Span

(a)	Thickness TCT (mm)	0.80						
(b)	Slab Thickness (mm)	100	125	150	175	200	225	250
(ci)	Single Span (mm)	2300	2200	2100	2000	1900	1800	1700
(cii)	Continuous (mm)	2300	2200	2100	2000	1900	1800	1700

(a)	Thickness TCT (mm)	1.00						
(b)	Slab Thickness (mm)	100	125	150	175	200	225	250
(ci)	Single Span (mm)	2500	2400	2300	2200	2100	2000	1900
(cii)	Continuous (mm)	2800	2700	2600	2500	2400	2300	2200

Maximum Span With 1 Line Temporary Support At Center

(d)	Thickness TCT (mm)	0.80						
(e)	Slab Thickness (mm)	100	125	150	175	200	225	250
(fi)	Single Span (mm)	3100	3000	2900	2800	2700	2600	2500
(fii)	Continuous (mm)	3500	3400	3300	3200	3100	3000	2900

(d)	Thickness TCT (mm)	1.00						
(e)	Slab Thickness (mm)	100	125	150	175	200	225	250
(fi)	Single Span (mm)	3400	3300	3200	3100	3000	2900	2800
(fii)	Continuous (mm)	3900	3800	3700	3600	3500	3400	3300

Raw Material


Ledex® Mega Floor Deck use high tensile steel with minimum yield strength of 550Mpa and a minimum zinc coating mass of 180 g/m² or 275 g/m².

Embossment

Embossed on each face of the web to provide mechanical connection between the steel and the hardened concrete.



Specification Drawing

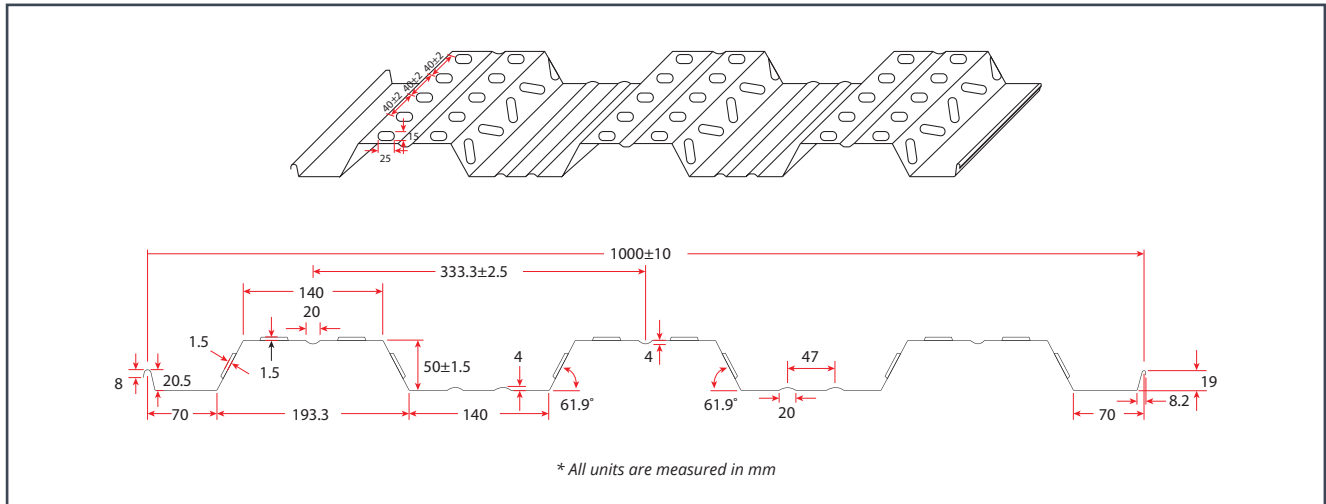

Product Specification

Profile		Ledex® Giga Floor Deck		
Effective Width		1000 mm		
Steel Grade		Hot Dip Galvanized High Tensile Steel with Minimum Yield Strength of 550Mpa		
Zinc Coating Mass		180g/m ² , 275g/m ²		
Tolerance		Length ±10 mm, Width ±10 mm, Thickness ±0.02 mm		
Thickness TCT (mm)		0.8	1.0	1.2
Weight	(kg/m)	8.80	10.35	12.30
	(kg/m ²)	8.80	10.35	12.30
Steel Area (mm ² /m)		911.3	1142.0	1371.50
Second Moment of area I _{NA} (mm ⁴ /m)		466142	583778	700657
Height to Neutral Axis \bar{y} (mm)		25.05	25.06	25.08
Moment Capacity M _c (kNm/m)		29.45	39.97	48.69

Maximum Un-Propped Span

(a)	Thickness TCT (mm)	0.80						
(b)	Slab Thickness (mm)	100	125	150	175	200	225	250
(ci)	Single Span (mm)	1830	1750	1690	1630	1590	1540	1500
(cii)	Continuous (mm)	2460	2360	2270	2200	2130	2080	2020

(a)	Thickness TCT (mm)	1.00						
(b)	Slab Thickness (mm)	100	125	150	175	200	225	250
(ci)	Single Span (mm)	1970	1890	1820	1760	1710	1660	1620
(cii)	Continuous (mm)	2650	2540	2450	2370	2300	2240	2180

(a)	Thickness TCT (mm)	1.2						
(b)	Slab Thickness (mm)	100	125	150	175	200	225	250
(ci)	Single Span (mm)	2090	2010	1940	1870	1820	1770	1720
(cii)	Continuous (mm)	2820	2700	2600	2520	2440	2380	2320

Maximum Span With 1 Line Temporary Prop At Center

(d)	Thickness TCT (mm)	0.80						
(e)	Slab Thickness (mm)	100	125	150	175	200	225	250
(fi)	Single Span (mm)	3010	2880	2780	2680	2620	2540	2470
(fii)	Continuous (mm)	3690	3540	3400	3300	3190	3120	3030

(d)	Thickness TCT (mm)	1.00						
(e)	Slab Thickness (mm)	100	125	150	175	200	225	250
(fi)	Single Span (mm)	2900	3110	3000	2900	2820	2730	2670
(fii)	Continuous (mm)	3800	3810	3670	3550	3450	3360	3270

(d)	Thickness TCT (mm)	1.20						
(e)	Slab Thickness (mm)	100	125	150	175	200	225	250
(fi)	Single Span (mm)	2900	3310	3200	3080	3000	2920	2830
(fii)	Continuous (mm)	3800	4050	3900	3780	3660	3570	3480

* Maximum construction imposed load is 1.5kN/m²


* Deflection based on L/360, wet concrete density of 24kN/m³

FLOOR DECK SPAN LIMIT EXPLANATION




Span Limit Explanation

Single Span

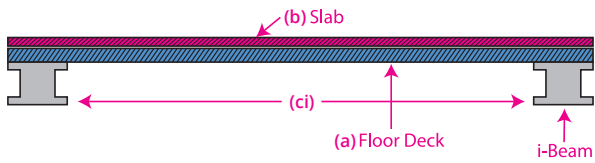


Single Span (With 1 Line Temporary Support At Midspan)

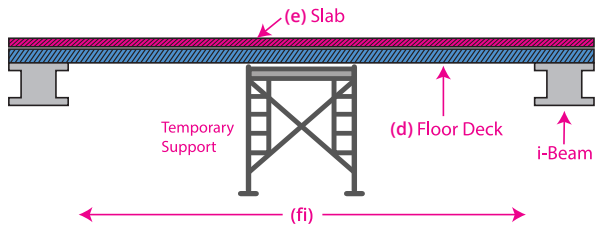


Span Limit Explanation


(cii) Continuous Span

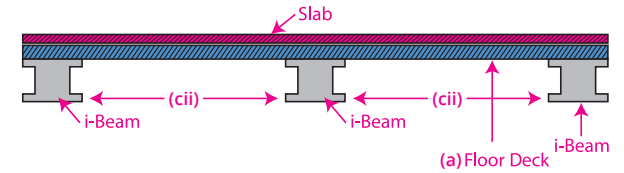



(fii) Continuous Span (With 1 Line Temporary Support At Midspan)

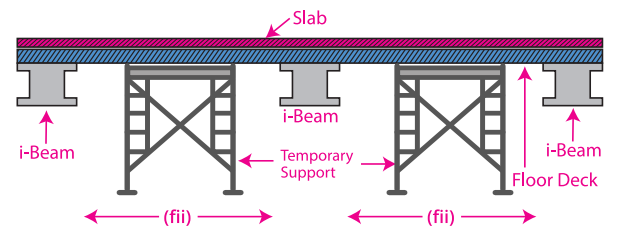


ON SITE INSTALLATION CONCEPT

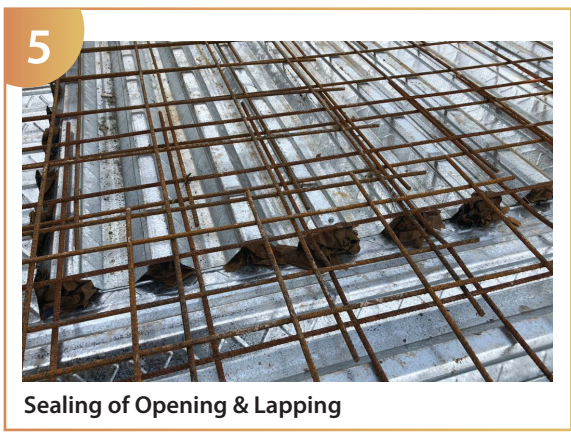


INSTALLATION

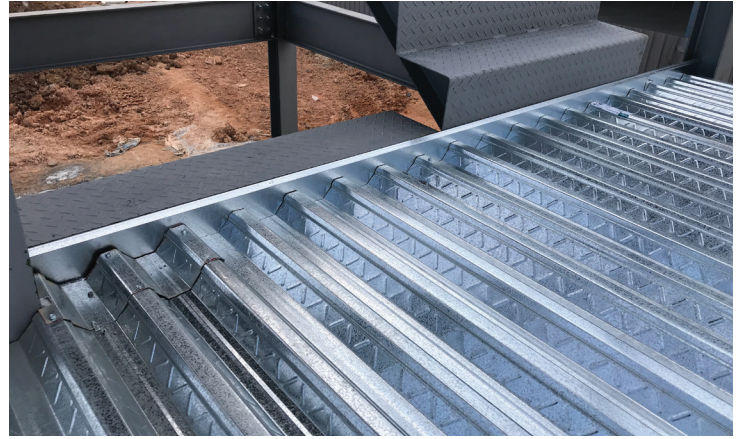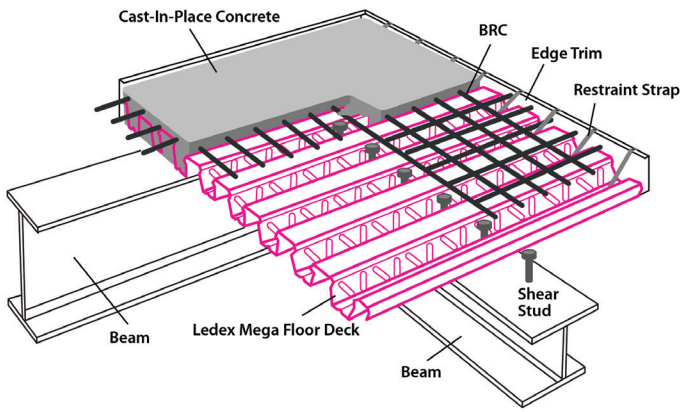


Ledex® Mega Floor Deck Installation Recommendation

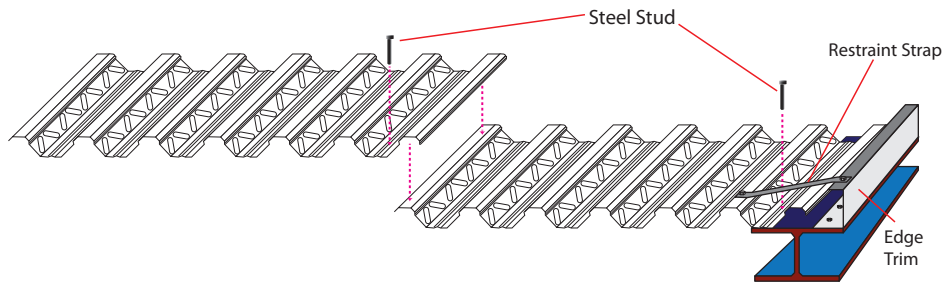


Ledex® Giga Floor Deck Installation Recommendation

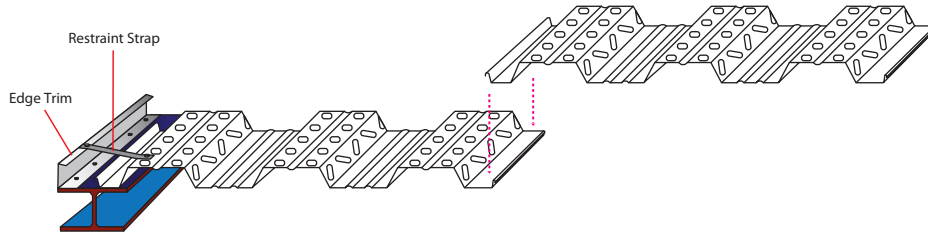


Floor Deck Construction Detail Typical Side Detail

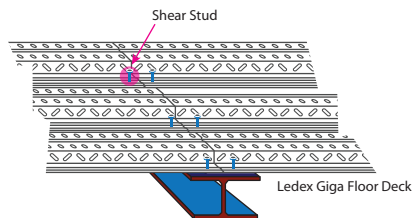


I - Beam Joint

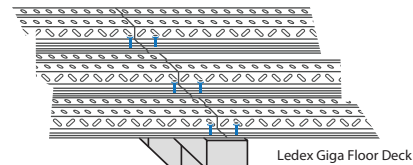

Brick Joint

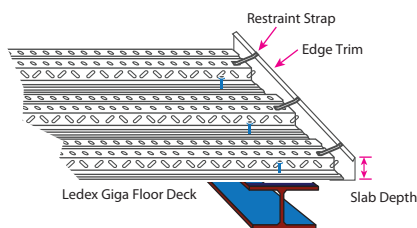


Typical End Cantilever

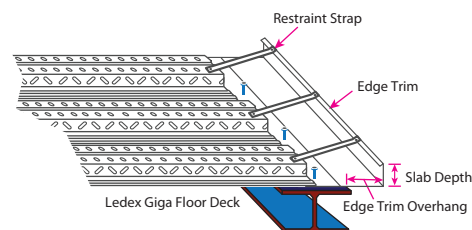


Typical End Detail

*Drawing for illustration purpose only

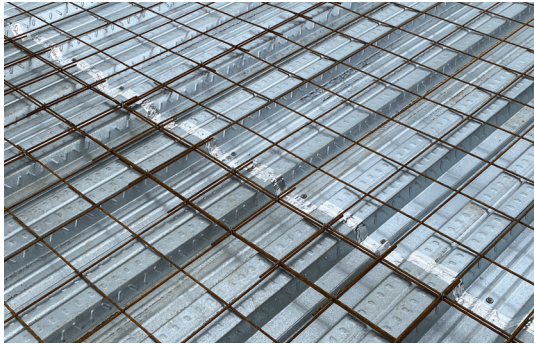

I-Beam Joint - Top View

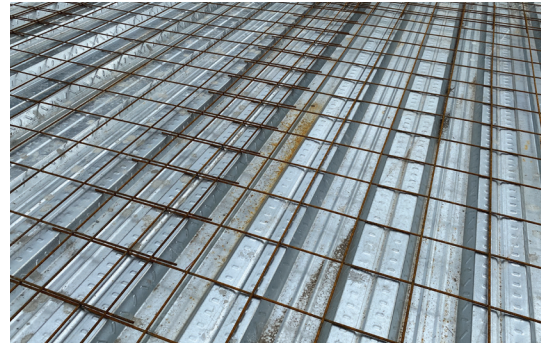


Overlapping Joint on top of I-Beam



I-Beam Joint - Bottom View




Overlapping Joint at bottom of I-Beam

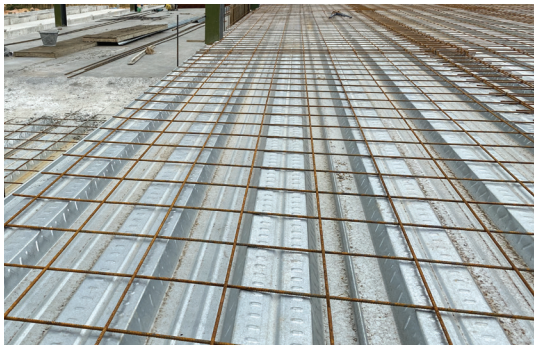


Continuous Span Installation



Continuous Installation

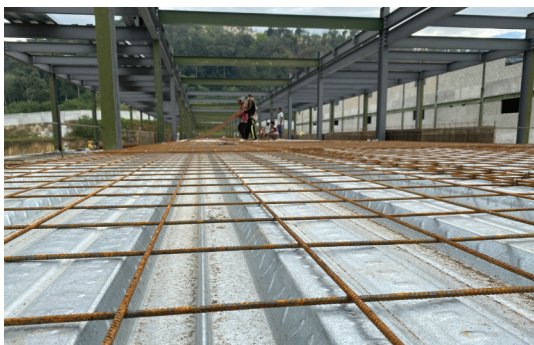

Lapping Joint

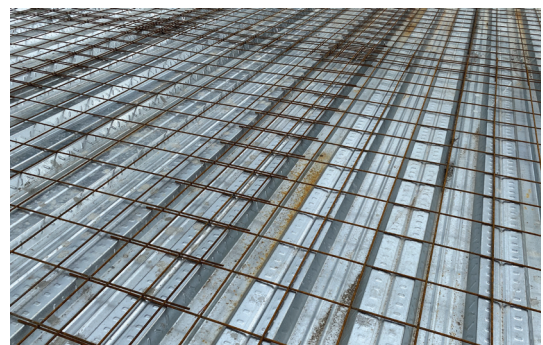

Lapping Joint

Shear Stud

The purpose of the shear stud is to provide a structural connection between the poured in place concrete slab and the structural steel. This structural connection distributes any shear forces that the structure may incur. Without the shear studs in place, there is a slip plane between the concrete slab, the floor deck and the structural steel framework of the project.

The structural engineer will determine, which beams will have the shear studs, the size of the studs as well as the number of studs to be installed. There are specialized subcontractors that will install the shear studs. The test for the shear studs integrity is simply striking the side of the shear stud with an iron mallet. This will ensure that the stud has been properly welded to the beam, if not, the stud will simply break off at the point of intersection with the steel beam. The stud will have failed due to a shear force. The deck may have to be installed and used as a platform before the studs are installed.



INSTALLATION





BONUS TIP: SHEAR STUD INSTALLATION THROUGH FLOOR DECK

Shear studs may be used as the primary attachment of the floor deck to the supporting members

Care should be taken at supports where floor ends meet, such as at a butt joint, to provide adequate attachment to the supporting member for sheet ends coming in from both sides of the support.

Studs may not be welded directly over a butted deck seam—that is, a stud weld shared between two sheets—if they are to be used as the primary deck attachment. This can cause deck sheets to tear away from the weld on the end of the deck during concrete placement.

The deck may have to be installed and used as a platform before the studs are installed.

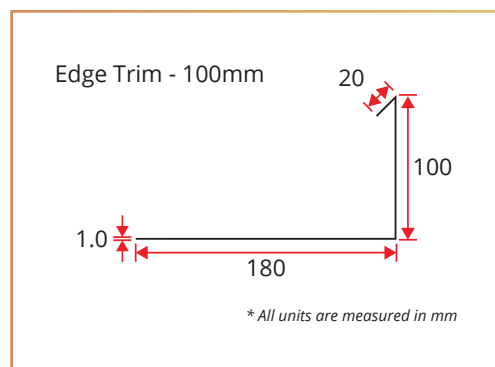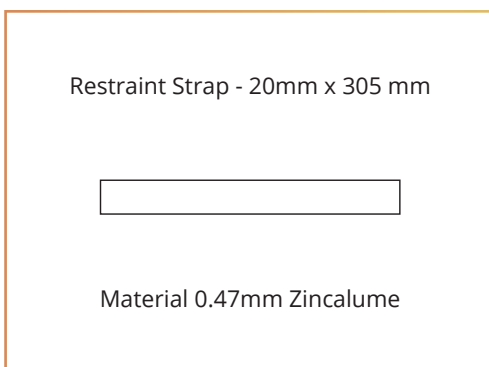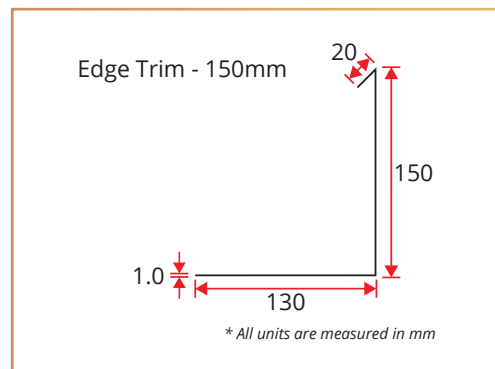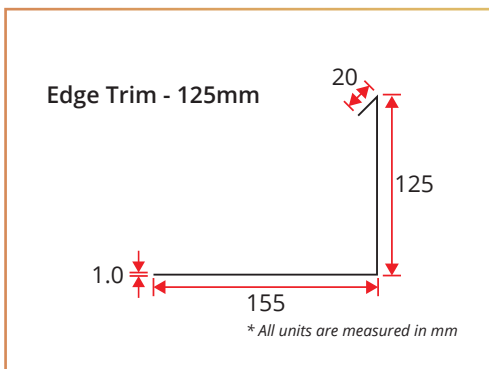

* Any special sizes will be customized on demand

PROJECT REFERENCES



Project Title: Evergreenery
Location : Sungai Petani, Kedah



Project Title: Warehouse Extension
Location : Butterworth, Penang



Project Title: Agro Chicken Farm
Location : Valdor, Penang

PROJECT REFERENCES



Project Title: Inventec Appliances (Malaysia) Sdn Bhd
Location : Bayan Lepas, Penang



Project Title: Yolink
Location : Science Park, Penang



Project Title: Penang Hill Viewing Platform
Location : Bukit Bendera, Penang

STRUCTURAL MATERIAL

Ledex Structural Products are made by 3 types of materials

TRUECORE®

Light Weight Truss Material

Superior corrosion resistance (AZ150) with high tensile steel grade (G550).

Blue Tint resin with double sinusoidal branding text.

Warranty 50 years against structural failure by corrosion. (T&C Applied)

BLUESCOPE ZACS®

Light Weight Truss Material

Good corrosion resistance (AZ100) with high tensile steel grade (G550).

Blue Tint resin with single sinusoidal branding text.

Warranty 10 years against structural failure by corrosion. (T&C Applied)

HOT DIP GALVANIZED

C Purlin & Floor Decking Material

Good corrosion resistance (Z180/Z275) with high tensile steel grade (G450)

Or other application purposes applied.


Warranty up to 15 years against structural failure by corrosion. (T&C Applied)

TrueCore®

0.42 mm - 1.20 mm BMT




0.40 mm - 1.0 mm BMT



Hot Dip Galvanized

0.75 mm - 3.0 mm BMT



COLOR CHART

BLUESCOPE Zacs **10+5** WARRANTY

Natural

- CLOUDY DAY
- LAVAROCK
- GREEN SUMMER
- SMOKYROCK
- SANDY SAHARA
- HEAVENLY BLUE
- COTTON MALLOW
- SAPPHIRE
- RED GARDEN
- Elements CHERRY MABELIA (WOOD GRAIN)



Zacs® Bare



Zincalume®



TrueCore®

Most Popular

*Color chart for reference only; actual colors may vary.

LE NAM MEGASHEET (M) SDN BHD

No. 768, Lorong Perusahaan Bukit Minyak 9,
Kawasan Perindustrian Bukit Minyak,
MK 13, 14100 Seberang Perai Tengah,
Pulau Pinang.

PENANG BRANCH

No. 736, Lorong Perusahaan Bukit Minyak 11,
Kawasan Perindustrian Bukit Minyak,
MK 13, 14100 Seberang Perai Tengah,
Pulau Pinang.

KEDAH BRANCH (SP)

Lot 33, Jalan 8,
Kawasan Perindustrian Bakar Arang,
08000 Sungai Petani,
Kedah.

KEDAH BRANCH (AS)

542, Jalan Tandop 1,
Kawasan Perindustrian Tandop Baru,
05050 Alor Setar,
Kedah.

LE NAM MEGASHEET (PERAK) SDN BHD

Lot 304989, Jalan Seramik Chepor 11/1,
Pusat Seramik Fasa 2,
31200 Chepor,
Perak.

LE NAM MEGASHEET (KL) SDN BHD

2, Jalan Titanium, 2, Presint 1,
Bandar Industri Bernilai Tinggi,
48200 Serendah,
Selangor



CONTACT US

LE NAM MEGASHEET (M) SDN BHD is committed
to serve you the way you want conveniently.
Contact us (+604-501 6133) in person at one of
our many locations or email us
enquiry@lenam.com.my

Disclaimer:

The information on the materials presented herein is provided for informational purposes only. Le Nam Megasheet (M) Sdn. Bhd. shall not liable for any loss or damage whichsoever arising from, but not limited to the usage of information provided. Any omission, errors, typographic errors and technical inaccuracies relating to the information may be changed or updated without notice.

Copyright©2025 Le Nam Megasheet (M) Sdn. Bhd. All right reserved. No part of this catalogue may be reproduced, stored in a retrieval, or transmitted in any form or by any means, electronic mechanical, photocopying, recording or otherwise, without the written permission of Le Nam Megasheet (M) Sdn. Bhd.

www.lenam.com.my

Safety
Handling



Scan to check out our
website

